

Project: _____

Dealer: _____

Architect: _____



Engineer: _____

Contractor: _____

Location: _____

Suppliers: _____

Date: _____

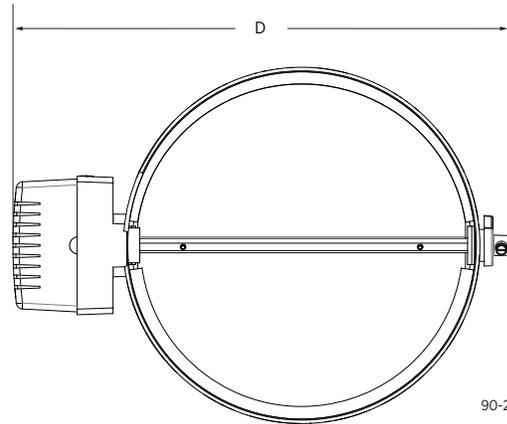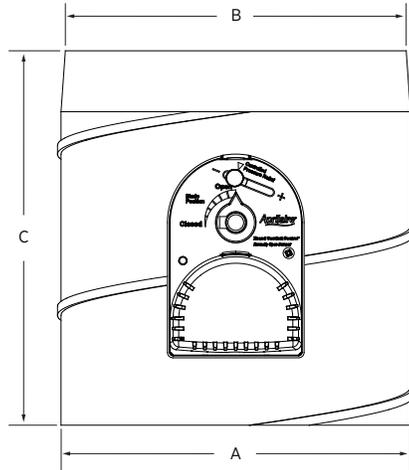

90-2126

Part #	Size	A	B	C	D	Shipping Weight
6606	6"	6.03" (153mm)	5.77" (147mm)	10.75" (273mm)	10.38" (264mm)	5 lbs.
6607	7"	7.03" (179mm)	6.77" (172mm)	10.75" (273mm)	11.38" (289mm)	5 lbs.
6608	8"	8.03" (204mm)	7.77" (197mm)	10.75" (273mm)	12.38" (314mm)	6 lbs.
6609	9"	9.03" (229mm)	8.77" (223mm)	10.75" (273mm)	13.38" (340mm)	7 lbs.
6610	10"	10.03" (255mm)	9.77" (248mm)	10.75" (273mm)	14.38" (365mm)	8 lbs.
6612	12"	12.03" (306mm)	11.77" (299mm)	12.75" (324mm)	16.38" (416mm)	10 lbs.
6614	14"	14.03" (356mm)	13.77" (350mm)	14.75" (375mm)	18.38" (467mm)	12 lbs.
6616	16"	16.03" (407mm)	15.77" (401mm)	16.75" (425mm)	20.38" (518mm)	15 lbs.
6618	18"	18.03" (458mm)	17.77" (451mm)	19.62" (498mm)	21.40" (544mm)	19 lbs.
6620	20"	20.03" (509mm)	19.77" (502mm)	22.00" (559mm)	23.40" (594mm)	23 lbs.

NOTES:

Applications: Compatible with Aprilaire® Zone Control System. Dampers are designed to work in low pressure systems (less than 1.0" w.c.).

Electrical Ratings: Two wire; power closed/spring open; 24VAC 6W, 60Hz, 10VA. Synchronous type motor, impedance protected for continuous stall capability without electrical or mechanical damage. Damper comes with motor mounted.

The submittal is intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale. Ensure submittals are current. Research Products reserves the rights to make product change without notifications or obligations.