
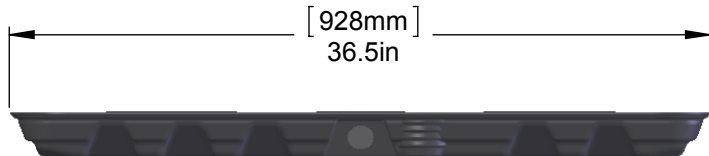


C

B

C

B

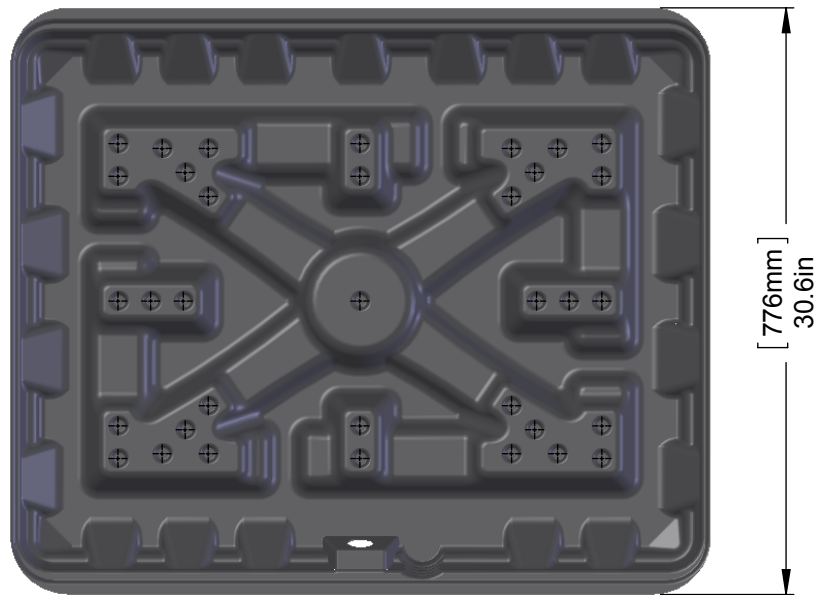

**NOTES:**

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- DexElar Material is UL-94 5VA
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL ±.032  
 ANGULAR: MACH ± .5° BEND ±2°  
 TWO PLACE DECIMAL ± .010  
 THREE PLACE DECIMAL ± .005

INTERPRET GEOMETRIC  
 TOLERANCING PER: ANSI Y14.5, 1994

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	12/7/08
CHECKED BY ENG.	JK	12/7/08
ENG APPR.	CC	12/7/08
MFG APPR.	CC	12/7/08

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 RESOURCE CONSERVATION  
 TECHNOLOGIES, INC. ANY  
 REPRODUCTION IN PART OR AS A  
 WHOLE WITHOUT THE WRITTEN  
 PERMISSION OF RESOURCE  
 CONSERVATION TECHNOLOGIES IS  
 PROHIBITED.

**RESOURCE**  
 CONSERVATION TECHNOLOGIES

64208 PARKLAND DRIVE SUITE 102  
 SARASOTA, FL 34243 888-708-6622

TITLE:

**AG-GF 30x36 SPECIFICATION SHEET**

SIZE  
**A**

SCALE: 1:10

SHEET 1 OF 1

A