

5



4

3

2



1

C

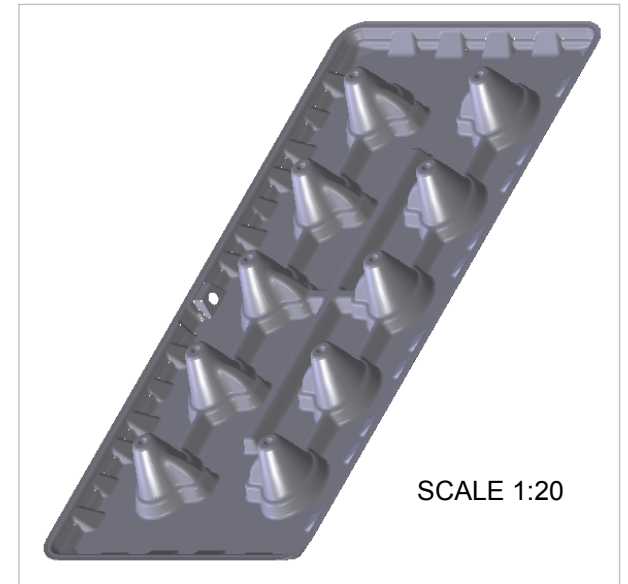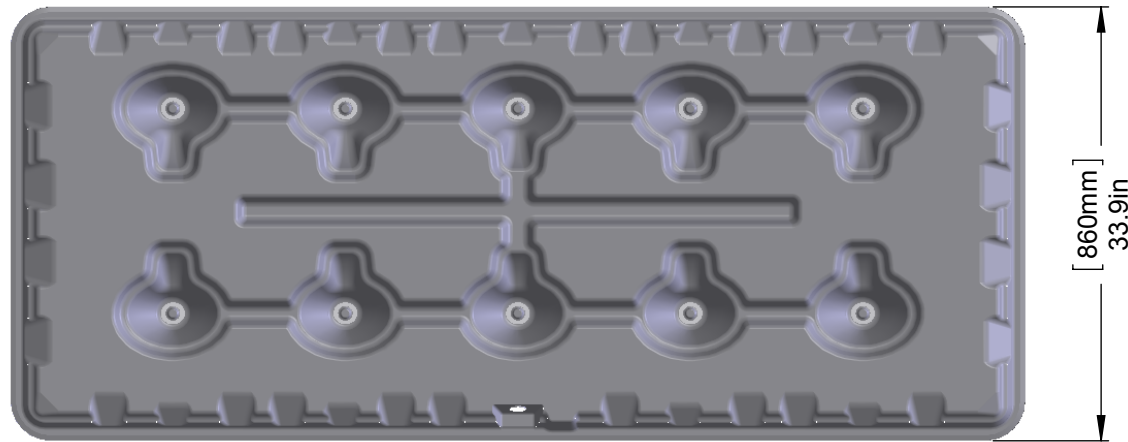

C

B

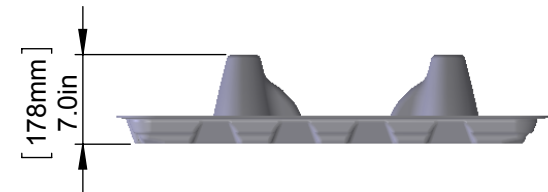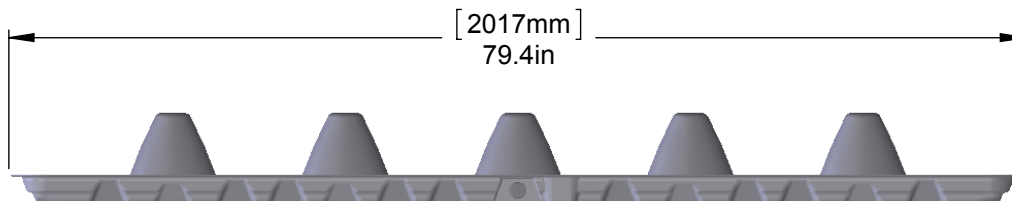

B

NOTES:

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- DexElar Material is UL-94 5VA
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm .032$
ANGULAR: MACH $\pm .5^\circ$ BEND $\pm 2^\circ$
TWO PLACE DECIMAL $\pm .010$
THREE PLACE DECIMAL $\pm .005$

INTERPRET GEOMETRIC
TOLERANCING PER: ANSI Y14.5, 1994

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	7/7/04
CHECKED BY ENG.	JK	7/7/04
ENG APPR.	CC	7/7/04
MFG APPR.	CC	7/7/04

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
RESOURCE CONSERVATION
TECHNOLOGIES, INC. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF RESOURCE
CONSERVATION TECHNOLOGIES IS
PROHIBITED.

RESOURCE
CONSERVATION TECHNOLOGIES
64208 PARKLAND DRIVE SUITE 102
SARASOTA, FL 34243 888-708-6622

TITLE:

AG-GF 34x79 SPECIFICATION SHEET

SIZE
A

SCALE: 1:15

SHEET 1 OF 1

A

5

4

3

2

1