

5


4

3



2

1

C

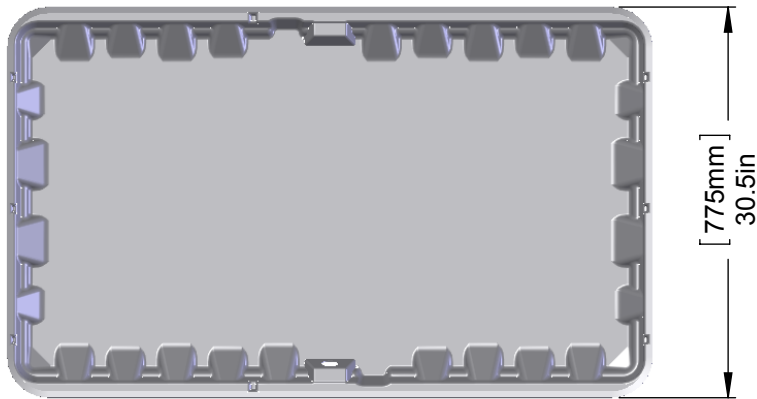

B

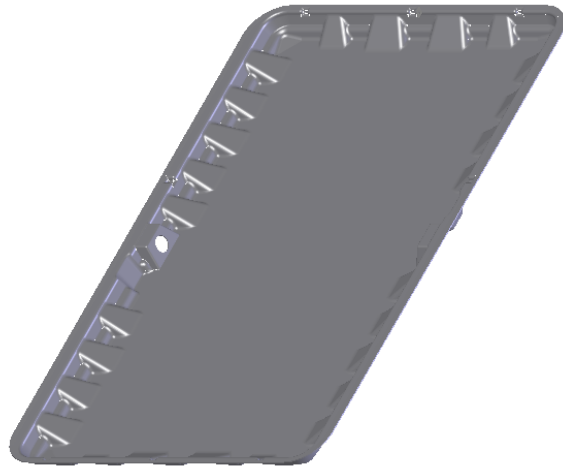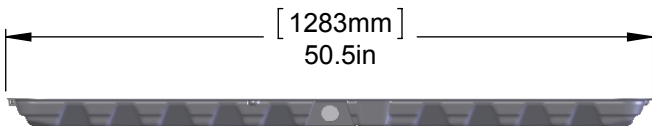

C

B



**NOTES:**

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- DexElar Material is UL-94 5VA
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm .032$   
ANGULAR: MACH  $\pm .5^\circ$  BEND  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm .010$   
THREE PLACE DECIMAL  $\pm .005$

INTERPRET GEOMETRIC  
TOLERANCING PER: ANSI Y14.5, 1994

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	11/14/08
CHECKED BY ENG.	JK	11/14/08
ENG APPR.	CC	11/14/08
MFG APPR.	CC	11/14/08

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
RESOURCE CONSERVATION  
TECHNOLOGIES, INC. ANY  
REPRODUCTION IN PART OR AS A  
WHOLE WITHOUT THE WRITTEN  
PERMISSION OF RESOURCE  
CONSERVATION TECHNOLOGIES IS  
PROHIBITED.

**RESOURCE**  
CONSERVATION TECHNOLOGIES  
64208 PARKLAND DRIVE SUITE 102  
SARASOTA, FL 34243 888-708-6622

TITLE:

AG-T 30x50 SPECIFICATION SHEET

SIZE  
**A**

SCALE: 1:15

SHEET 1 OF 1

A

5

4

3

2

1