


# AP/Coilflex®

## Duct Liner

Fiber Free

The fiber-free, thermal and acoustical conformable duct liner engineered to safeguard IAQ, attenuate HVAC noise and reduce energy loss

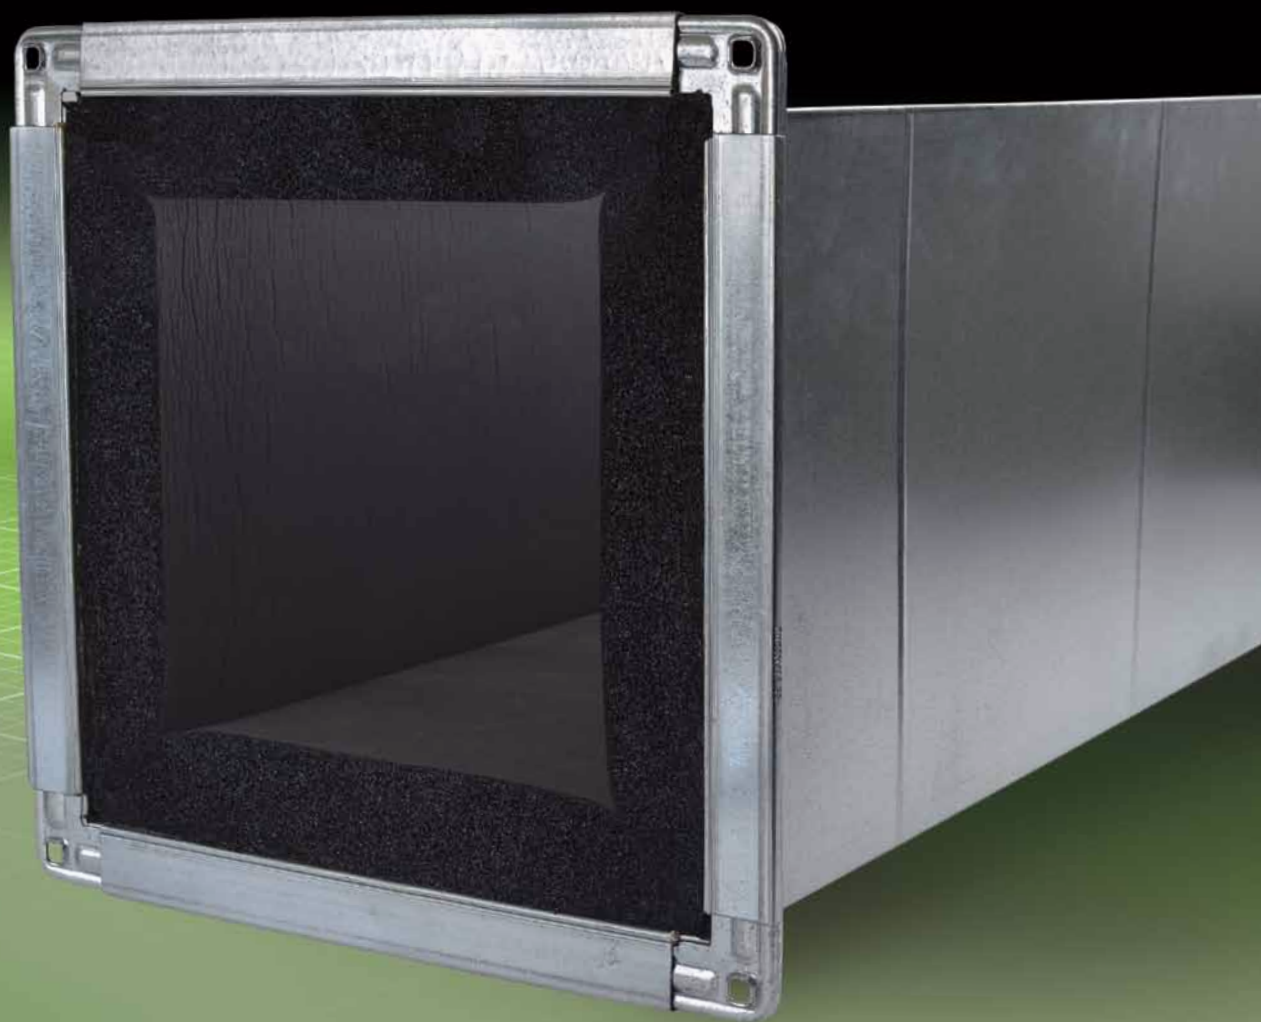

- Excellent at attenuating airborne noise to reduce background noise from HVAC systems – 0.60 NRC
- Soft elastomeric foam easily conforms to fabricated duct corners without compression to maintain integrity of insulation
- Fiber-free, non-particulating, formaldehyde-free, free of PDBE flame retardants, low VOC, manufactured with built-in Microban® antimicrobial protection to improve Indoor Air Quality
- Meets ASHRAE 90.1 - 2010, ASHRAE Standard 189.1, IECC 2012 and California Title 24 for increased energy efficiency

 **armacell**  
advanced insulation



## Technical Data: AP Coilflex® Duct Liner

### Description:

Black, conformable, elastomeric, thermal and acoustical duct liner in roll form

### Specifications Compliance:

ASTM C 1534 ASTM E84	NFPA 90A, 90B NFPA 255	UL 181 UL 723
-------------------------	---------------------------	------------------

### Approvals, Certifications, Compliances:

- GREENGUARD® Children & Schools Indoor Air Quality certified.
- Made with EPA registered Microban® antimicrobial product protection.
- Manufactured without CFCs, HFCs, HCFCs, PBDEs, or Formaldehyde.
- All Armacell facilities in North America are ISO 9001:2008 certified.

### Typical Properties

Specifications:	Values		Test Method:
	AP Coilflex 1"	AP Coilflex 1-1/2"	
Thermal Conductivity: Btu • in./h • ft² • °F (W/mK)			
75°F Mean Temperature (24°C) 90°F Mean Temperature (32°C)	0.25 (0.036) 0.256 (0.037)	0.28 (0.040) 0.256 (0.037)	ASTM C 177 or C 518
Flame Spread and Smoke Developed Index:	25/50 rated	25/50 rated	
Mold Growth: Fungi Resistance: Bacterial Resistance:	Passed	Passed	UL181 ASTM G21/C1338 ASTM G22
Upper Use Limit:	180°F (82°C)	180°F (82°C)	ASTM C534
Lower Use Limit:	-297°F (-183°C)	-297°F (-183°C)	ASTM C534
Erosion Resistance:	Does not break away, flake off or show evidence of delamination at velocities of 10,000 ft/min		ASTM C 1071
Corrosiveness:	Noncorrosive	Noncorrosive	ASTM C 665
Odor Emissions:	No objectionable odors	No objectionable odors	ASTM C 665

### R-VALUE

#### R-4.2

#### R-6

	1"	1-1/2"
--	----	--------

### Sizes: Wall Thickness

#### Roll Width

1"	46"	47"	48"	56-1/4"	59"	60"
1-1/2"	-	-	48"	-	-	-

### Sound Absorption Coefficients at Frequency

	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	NRC	SAA
Thickness Nom. 1" [25mm]	0.08	0.22	1.03	0.37	0.68	0.50	0.60	0.52

### ARMACELL LLC

TEL: 800.866.5638

FAX: 919.304.3847

info.us@armacell.com

www.armacell.us

7600 Oakwood Street Extension, Mebane, NC 27302



Armacell provides this information as a technical service. To the extent the information is derived from sources other than Armacell, Armacell is substantially, if not wholly, relying upon the other source(s) to provide accurate information. Information provided as a result of Armacell's own technical analysis and testing is accurate to the extent of our knowledge and ability, as of date of printing, using effective standardized methods and procedures. Each user of these products, or information, should perform their own tests to determine the safety, fitness and suitability of the products, or combination of products, for any foreseeable purposes, applications and uses by the user and by any third party to which the user may convey the products. Since Armacell cannot control the end use of this product, Armacell does not guarantee that the user will obtain the same results as published in this document. The data and information are provided as a technical service and are subject to change without notice. The GREENGUARD Children & Schools Certified Mark is a registered certification mark used under license through the GREENGUARD Environmental Institute. Microban is a registered trademark of Microban Products Company.