## Air Handler Heat Pump Ductless System

**Indoor Model:** 

40MBAAQ36XA3

# **Submittal Data**

Job Data:		Location:	
Buyer:	Buyer P.O. #:	Carrier #:	
Unit Number:		Model Number:	
	Performance Data Certified By:	Date:	



#### STANDARD FEATURES

Modes: Cool, Heat, Dry, Fan, Auto 4 way installation (Up flow, Down flow, Right, Left) Static Pressure up to 0.8 inWG Less than 2% air leakage Quiet indoor operation Aluminum Hydrophilic pre-coated fins

#### Controls:

Wireless Remote Controller included with indoor unit 24V Interface for third party thermostat compatibility built-in

#### LIMITED WARRANTY\*

• 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years

\*For residential applications. See warranty for full details.

Face Area

System	Size	36	
System	Indoor Model		40MBAAQ36XA3
	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
Electrical	Power Supply	Indoor unit powered from outdoor unit	
	MCA	A.	5
Controls	Wireless Remote Controller (°F/°C Convertible)		Standard
Controls	Wired Remote Controller (°F/°C Con	Standard	
Operating	Cooling Indoor DB Min -Max	° F (° C)	62~90 (17~32)
Range	Heating Indoor DB Min -Max	° F (° C)	32~86 (0~30)
	Pipe Connection Size - Liquid	in (mm)	3/8 (9.52)
Piping	Pipe Connection Size - Suction	in (mm)	5/8 (16)

For Compatibility See Product Data

No. Rows		4	
Fins per inch		20	
Circuits	8		
Unit Width	in (mm)	19.6 (498)	
Unit Height	in (mm)	48.8 (1,240)	
Unit Depth	in (mm)	21.0 (533)	
Net Weight	lbs (kg)	144.8 (65.7)	
Number of Fan Speeds		4	
Airflow (lowest to highest)	CFM	824/1,000/1,176	
Sound Pressure (lowest to highest)	dB(A)	37.2/40.4/43/45.2	
Max Static Pressure	In.WG.	0.8	
Field Drain Pipe Size O.D.	in (mm)	3/4 (19.1)	
	Fins per inch Circuits Unit Width Unit Height Unit Depth Net Weight Number of Fan Speeds Airflow (lowest to highest) Sound Pressure (lowest to highest) Max Static Pressure	Fins per inch Circuits  Unit Width in (mm) Unit Height in (mm) Unit Depth in (mm) Net Weight Ibs (kg) Number of Fan Speeds Airflow (lowest to highest) CFM Sound Pressure (lowest to highest) dB(A)	

Sq. Ft.


1.69

 $Performance\ may\ vary\ based\ on\ the\ outdoor\ unit\ matched\ to.\ See\ compatible\ outdoor\ units\ pages\ for\ Performance\ Data.$ 

### Accessories

EHKMA05KN	Electric Heater 5kW
EHKMA10KN	Electric Heater 10kW
EHKMA15KN	Electric Heater 15kW

Page 1

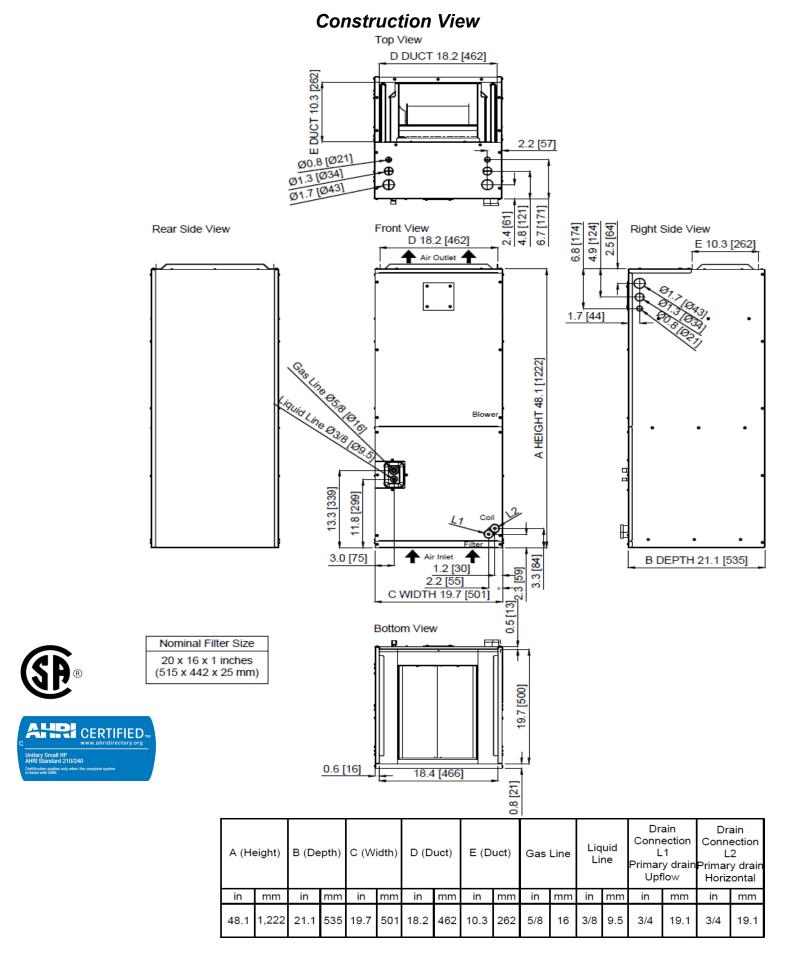

Edition Date: 07/2020