Ducted Style Heat Pump Ductless System

Indoor Model:

40MBDQ36---3

Submittal Data

Job Data:		Location:	
Buyer:	Buyer P.O. #:	Carrier #:	
Jnit Number:		Model Number:	
	Performance Data Certified By:	Date:	



STANDARD FEATURES

Modes: Cool, Heat, Dry, Fan, Auto Vertical or Horizontal Installation Rear or Bottom Return Outside Air Intake

Built-in condensate Lift pump

Follow Me (senses temperature at handheld remote)

Heating Setback (46° F Heating Mode)

Quiet indoor operation Anti-corrosive fin coating





Controls:

Wired Remote Controller (Timer Function)

Wired Remote Controller KSACN0501AAA (7 Day programmable) included with indoor unit

LIMITED WARRANTY*

• 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years

*For residential applications. See warranty for full details.

System	Size	36	
System	Indoor Model	40MBDQ363	
	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
Electrical	Power Supply	Powered from outdoor unit	
	MCA	A.	2.45
Controls	Wireless Remote Controller (°F/°C Convertible)		Standard
Controls	Wired Remote Controller (°F/°C Convertible)		Standard
Operating	Cooling Indoor DB Min -Max	° F (° C)	63~90 (17~32)
Range	Heating Indoor DB Min -Max	° F (° C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	3/8 (9.52)
Fibilig	Pipe Connection Size - Suction	in (mm)	5/8 (16)

	Face Area	Sq. Ft.	3.7
Indoor Coil	No. Rows		4
mador Con	Fins per inch	16	
	Circuits	7	
	Unit Width	in (mm)	53.54 (1360)
	Unit Height	in (mm)	9.8 (249)
	Unit Depth	in (mm)	30.47 (774)
	Net Weight	lbs (kg)	106.48 (48.3)
	Number of Fan Speeds	3	
Indoor	Airflow (lowest to highest)	CFM	700/910/1080
	Sound Pressure (lowest to highest)	dB(A)	38.5/42/45.5
	Max Static Pressure	In.WG.	0.64
	Field Drain Pipe Size O.D.	in (mm)	1 (25.4)

For Compatibility See Product Data

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.


Accessories

KSACN0101AAA	Optional Wired Remote Control with Timer Function
KSACN0501AAA	Shipped with the unit Wired Remote Control 7 day Programmable
KSAIF0401AAA	Wi-Fi™ Kit
KSAIC0101230	24V Interface Kit 208/230V
53DS-900090	Wireless Remote Control Locking Mount Kit

Copyright 2018 CAC/BDP • 7310 W. Morris St. Indianapolis, IN 46231

Edition Date: 03/2018

Catalog No: 40MBDQ-36-3-02SB

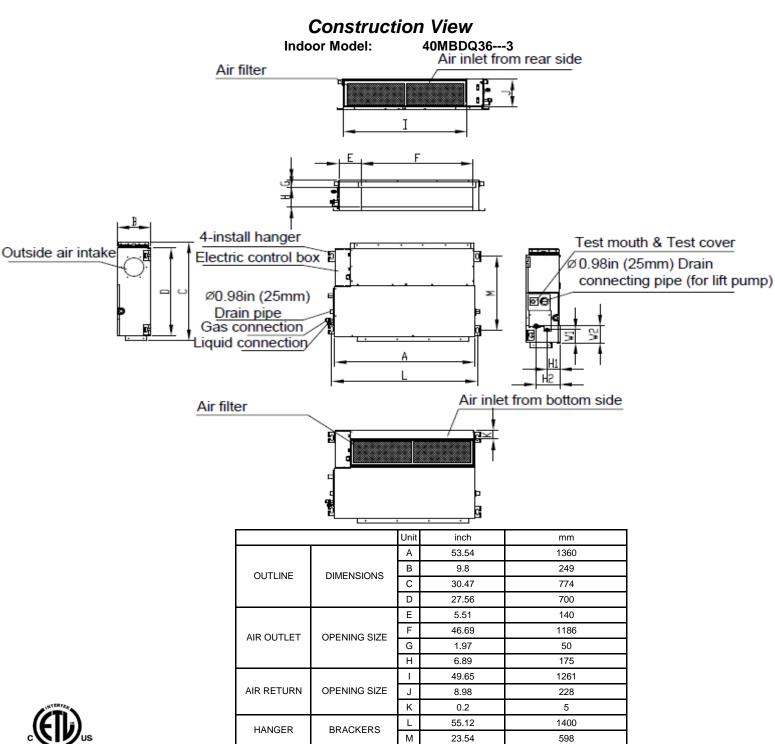





H1

H2

W1

W2

LOCATIONS

lb (kg)

REFRIGERANT

PIPE

OPERATING

WEIGHT

3.15

5.91

5.12

6.1

106

80

150

130

155

48.3