

XPOWERBlue II

UP TO
16
SEER



High Technology and Savings

UP TO 50%
IN ENERGY SAVINGS



www.carriercca.com

Carrier

turn to the experts™





Carrier® the experts in air conditioning, have been cooling the world for more than 100 years.


Our experts always strive to offer you the latest technologies, to keep you comfortable in your home or office. Our new hi-wall is not the exception. It offers the perfect combination of energy savings, with savings of over 50% compared to traditional systems, plus the quality and style distinctive of all Carrier® products.

The unit is quiet, stylish and efficient. It also brings a convenient digital panel that displays the temperature and other programmable functions which are easily set with the unit's remote control.

Experience the cool comfort that the Carrier® Xpower Blue II hi-wall can create in your space.

Features:

- Active Carbon Filter
- Turbo Mode
- Sleep Mode
- 24Hrs Timer
- LED Display
- Auto Level Swing
- Condenser with anti-corrosion protection

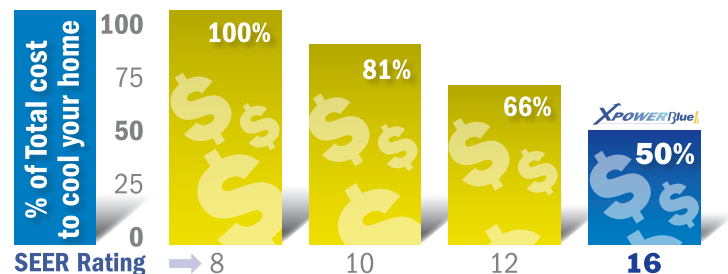

Indoor Unit Model			42KCL109313G	42KCL112313G	42KCL118313G	42KCL124313G
Outdoor Unit Model			38KCL109313G	38KCL112313G	38KCL118313G	38KCL124313G
Model including Piping Kit			38KCL109313GP	38KCL112313GP	38KCL118313GP	38KCL124313GP
Power supply		Ph-V-Hz	1Ph, 208-230V, 60Hz	1Ph, 208-230V, 60Hz	1Ph, 208-230V, 60Hz	1Ph, 208-230V, 60Hz
Cooling	Capacity	Btuh	9000 (3000~10500)	12000 (4000~13500)	18000 (5100~19000)	24000 (12000~24000)
	Input	W	840 (270~1250)	1100 (350~1400)	1710 (380~2300)	2330 (820~2750)
	Rated current	A	3.7 (1.6~5.5)	5.1 (1.7~6.8)	9.0 (1.8~10.4)	10 (3.6~12.5)
	SEER		15	16	16	16
Max. input consumption		W	1900	2000	2950	3200
Max. current		A	8.5	9.0	13.5	14.5
Compressor Type			Rotary	Rotary	Rotary	Rotary
Indoor coil	Number of rows		2	2	2	2
Indoor air flow (Hi/Mi/Lo)		m3/h	480/400/350	630/500/450	730/650/560	1100/1050/900
Indoor unit sound level (Hi/Mi/Lo)		dB(A)	38/33/28	40/33/27	44/41/36	50/47/44
Indoor unit	Dimension(W*D*H)	mm	710x195x250	790x195x265	920x225x292	1080x228x330
	Packing (W*D*H)	mm	800x270x340	875x285x375	1015x295x368	1165x445x320
	Net/Gross weight	Kg	7.5/9	9/11	11.5/14.5	15.5/20.5
Outdoor unit sound level		dB(A)	55	55	57	56
Outdoor unit	Dimension(W*D*H)	mm	700x235x535	780x250x540	760x285x590	845x335x695
	Packing (W*D*H)	mm	815x325x580	910x335x575	887x355x645	965x395x755
	Net/Gross weight	Kg	25/27	29/32.5	37/40.5	56/60
Refrigerant type		g	R410A/570g	R410A/690g	R410A/870g	R410A/1140g
Refrigerant piping	Liquid side / Gas side	mm(inch)	ø6.35/ø9.53 (1/4"/3/8")	ø6.35/ø12.7 (1/4"/1/2")	ø6.35/ø12.7 (1/4"/1/2")	ø9.53/ø16.0 (3/8"/5/8")
	Max. refrigerant pipe length	m	20	20	25	25
	Max. difference in level	m	8	8	10	10
Qty per 20'/40'/40'HQ			127/267/299	105/225/252	89/182/215	59/131/148

REV012013



Authorized Dealer

www.carriercca.com



turn to the experts™