


Complete Curb Products & Dynasonics Inc. 7229 Fairview St. Houston TX. 77041 P. 713-690-1622 F:713-690-1945

Rooftop Curb Adapter Construction Features/Specifications:

- 18ga. G90 min. construction.
- Fully mitered & continuous seam welded exterior with exception to blank-off panels when required.
- All welds prepared coated with corrosion inhibiting compound.
- Internal dividers/supports tack welded in.
- Complete interior insulated with 2" 1.5lb. (R8) acoustical insulation.
- All insulation is glued & mechanically pin spotted.
- Insulated top condenser panel screwed on when required.
- 1/4" x 1 1/2" neoprene gasket material supplied loose for field installation onto existing curb surface & the new adapter top surface.

Submittal drawing provided for all adapter combinations & signed approval required prior to ordering. The ordering party is to field verify the existing curb & clearances for the new adaper/unit replacement.

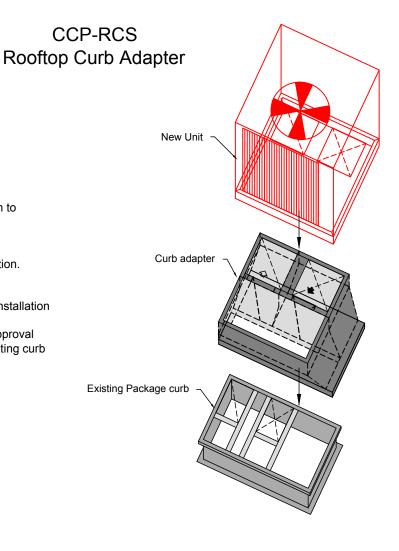

Rooftop Curb Adapter specification sheet