


MODEL: AXC IN-LINE DUCT FANS

AXC in-line duct fans are designed for industrial, commercial and residential ventilation applications. Combining a quiet and efficient backward curved impeller with a powerful and speed controllable motor, they are rugged, compact and easy to install.

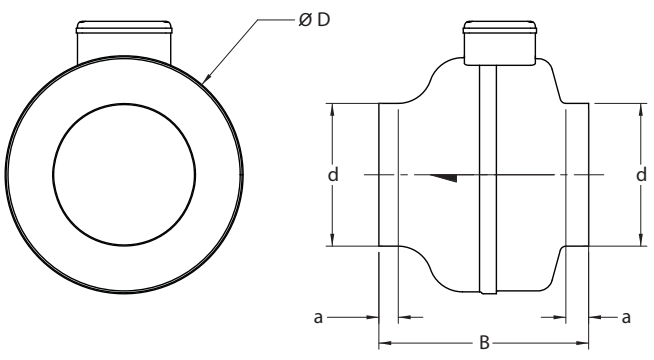


Ø D

d


a

B

DIMENSIONS IN INCHES					
MODEL	D	d	a	B	SHIP WT (lbs)
AXC100A-ES	9.5	3.9	1.0	8.3	7.5
AXC100B	9.5	3.9	1.0	8.3	8.0
AXC125A-ES	9.5	4.8	1.0	8.3	7.5
AXC125B	9.5	4.8	1.0	8.3	7.5
AXC150A-ES	9.5	5.8	1.0	8.3	7.5
AXC150B-ES	13.2	5.8	1.0	9.1	12.5
AXC200A-ES	13.2	7.8	1.0	9.1	12.0
AXC200B-ES	13.2	7.8	1.0	9.1	15.0
AXC250-ES	13.2	9.8	1.0	9.1	15.0
AXC300A-ES	15.9	11.8	1.2	11.8	18.0
AXC300B-ES	15.9	11.8	1.2	11.8	18.0
AXC355A	19.0	14.0	1.5	15.7	35.5
AXC355B	19.0	14.0	1.5	15.7	41.0



AXC models 355A and 355B are CSA listed to both US & Canadian standards.



Products are HVI certified for airflow and power at 0.2" SP.

CONSTRUCTION

- Heavy gauge, drawn steel housing
- Baked epoxy finish inside and out
- Large mounting collars for duct connections
- External junction box
- Pre-wired capacitor
- Mounting brackets
- Backward-curved impeller
- Precision balanced assembly

MOTORS

- Durable “external rotor” design
- Enclosed motor housing
- Dust and moisture resistant
- Ball bearings, permanently lubricated
- 120VAC, single phase
- Automatic reset thermal overload protection
- Infinitely variable fan speed capability

PROJECT					ARCHITECT				
DATE					ENGINEER				
SUBMITTED BY					CONTRACTOR				
SPECIFICATION									
FAN NO.	MODEL NO.	CFM	IN. WG	VOLTS	WATTS	AMPS	QTY	OPTIONAL EQUIPMENT	