

SUBMITTAL RECORD _____
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____




Submittal Form DNM Mini Dyn-O-Ties

DESCRIPTION

Duro Dyne UV DYN-O-TIES are made to resist Ultraviolet rays and adverse weather conditions when used in outdoor applications.

STORAGE

To ensure superior performance, nylon cable tie products should be stored in a sealed polyethylene bag at room temperature in at least 50% humidity (recommended 80% RH). Limit the exposure of unused cable ties to extreme heat and cold. Should cable ties be exposed to extreme temperatures and/or extreme relative humidity, store at room temperature and at least 50% humidity (recommended 80% RH) for at least 24 hrs in a sealed bag prior to further use.

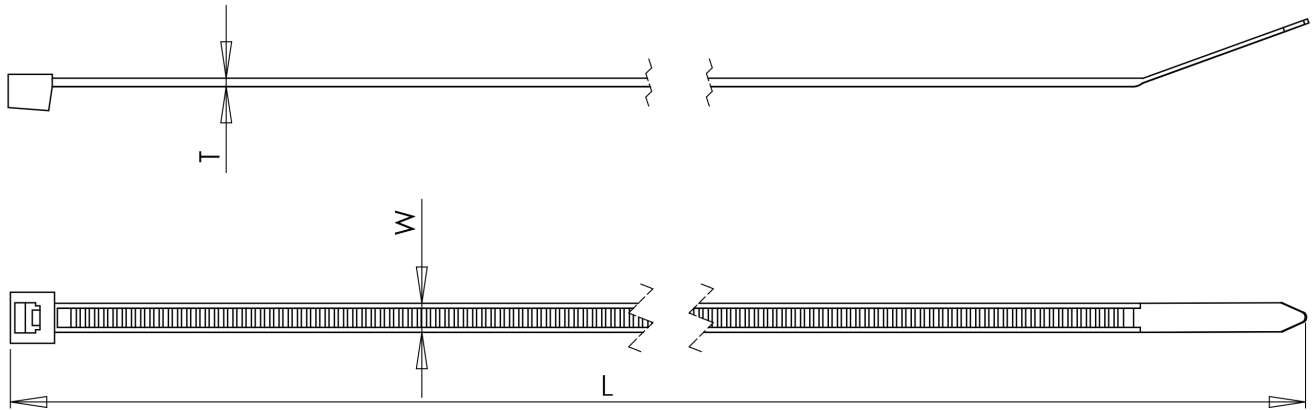

NYLON MINI DYN-O-TIES						
ITEM #	CODE	TYPE	COLOR	LENGTH	MAX. DIA.	PKG./CTN
7043	DNM05M	Nylon	Natural	5.91"	1.38"	10 Pks of 100
7042	DNM05UVM	Nylon	Black	5.91"	1.38"	10 Pks of 100
7018	DNM08M	Nylon	Natural	7.87"	1.97"	10 Pks of 100
7020	DNM08UVM	Nylon	Black	7.87"	1.97"	10 Pks of 100
7022	DNM11M	Nylon	Natural	11.02"	2.76"	10 Pks of 100
7024	DNM11UVM	Nylon	Black	11.02"	2.76"	10 Pks of 100
7026	DNM14M	Nylon	Natural	14.57"	4.02"	10 Pks of 100
7028	DNM14UVM	Nylon	Black	14.57"	4.02"	10 Pks of 100



Non-Metallic
Mechanical
Fastener

181B-C 13ER
MH19757

For use with UL nonmetallic
airducts and air connectors

*Note: Ties are tested to:
CSA C22.2NO.18.5-02 / UL 1565

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346
 Duro Dyne Midwest Division, Fairfield, OH 513-870-6000 Fax: 513-870-6005
 Duro Dyne West Division, Fontana, CA 562-926-1774 Fax: 562-926-5778
 Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328
 www.durodyne.com E-mail: durodyne@durodyne.com



©2016 Duro Dyne Corporation
 Printed in USA 07/16
 BO008408