





PROVEN PRODUCTS FOR THE HVAC INDUSTRY


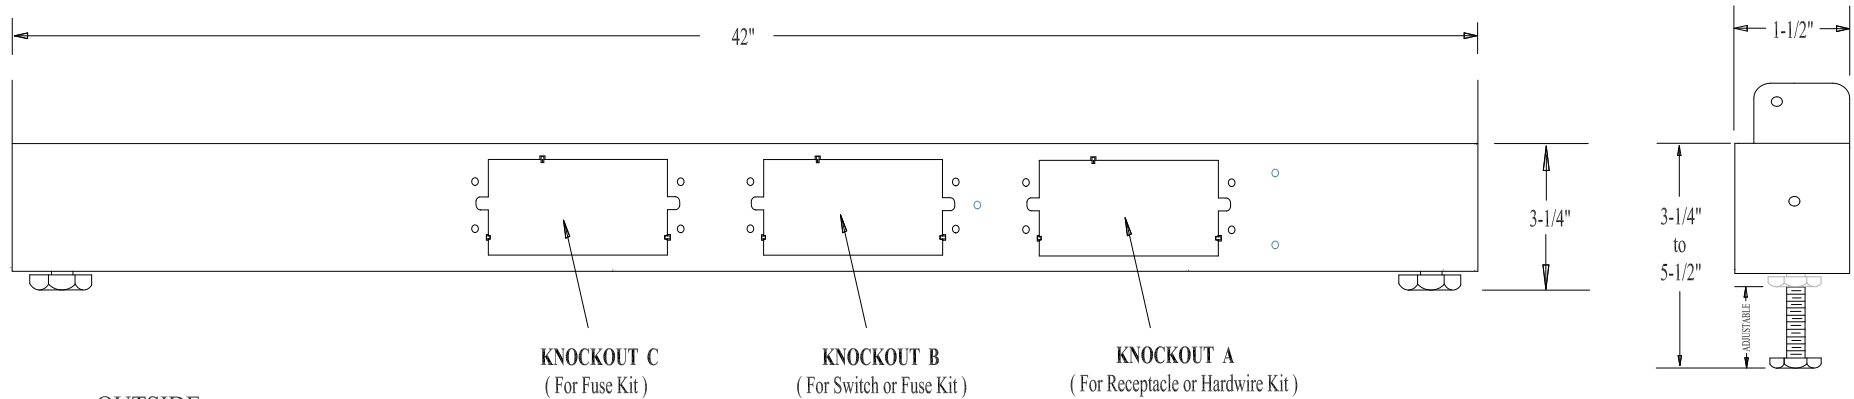


OUTSIDE WALL

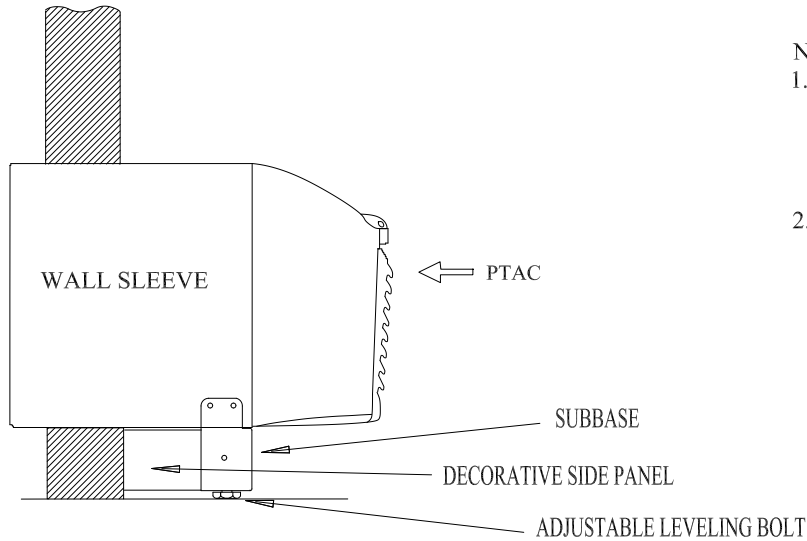

NOTES:

- Accessory subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room when adding one of the electrical kits.
 - Wall sleeve must be installed 3-1/4 in. minimum and 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

DRAWING RELEASE LEVEL:				First America Products, LLC							
THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS				THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO FIRST AMERICA PRODUCTS, LLC AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF FIRST AMERICA PRODUCTS, LLC.					
		TOLERANCES ON:									
MATERIAL		0 DEC	1 DEC	2 DEC	ANG	TITLE		DIMENSIONAL DRAWING SUBBASE-A			
		±1.0	±0.8	±0.25	±1.0°	SIZE					
		ENGINEERING		MANUFACTURING		DRAWING NUMBER					
WEIGHT:		DRAFTER		CHECKER		REV		SHEET 1 OF 1			
SURFACE FINISH		MODEL (INTERNAL USE ONLY)				NEXT DRAWING		SCALE		DISTRIBUTION	

TITLE
SUBBASE-A CERTIFIED DRAWING