

### SPECIFICATIONS

#### Input

- **Voltage:** 18-30 VAC
- **Frequency:** 50-60 Hz
- **Power Consumption:** 1 watt maximum

#### Output

- **O, W2**
  - Type: Relay
  - Form: DPST, normally open
  - Rating: 2 amps @ 24 VAC
- **DF1, DF2**
  - Type: Relay
  - Form: SPST, normally closed
  - Rating: 10 amps @ 240 VAC


#### Time Delays

- **Defrost:** Fixed at 10 minutes (+/- 10%)
- **Interval Between Defrost:**
  - Pin selectable (30/50/90 minutes)
- **Test Time:** Short across test terminals (TP1-TP2) before startup to reduce run time by 256x

#### Dimensions

- 4 3/4" x 5"
- **Mounting:** Surface mount using (4) #6 or #8 screws, or plastic stand offs

### WIRING DIAGRAM

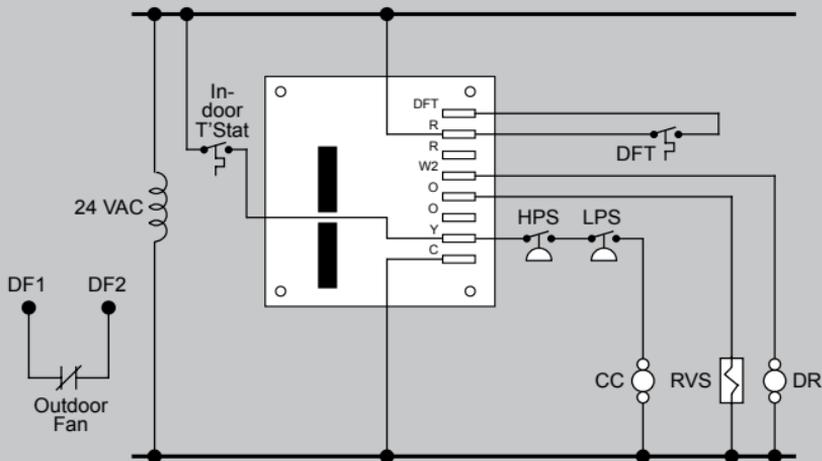

CC = Compressor  
 Contactor Coil  
 DR = Defrost Relay Coil

DFT = Defrost Thermostat  
 LPS = Low Pressure Switch

HPS = High Pressure Switch  
 RVS = Reversing Valve Solenoid