



THE ORIGINAL Mini-Saw™

For the jobs conventional hack saws cannot do. Slim profile Mini-Saw is ideal for working in very confined areas and for flush cutting at any angle. Indispensable to plumbing, heating, air-conditioning, refrigeration tradesmen and all servicemen. Saw uses all standard lengths of blades and other types of 1/2" (12.7 mm) saw blades. Finger locking screw makes blade changing easy. Nickel plated steel construction. Non-slip vinyl cushion grip.

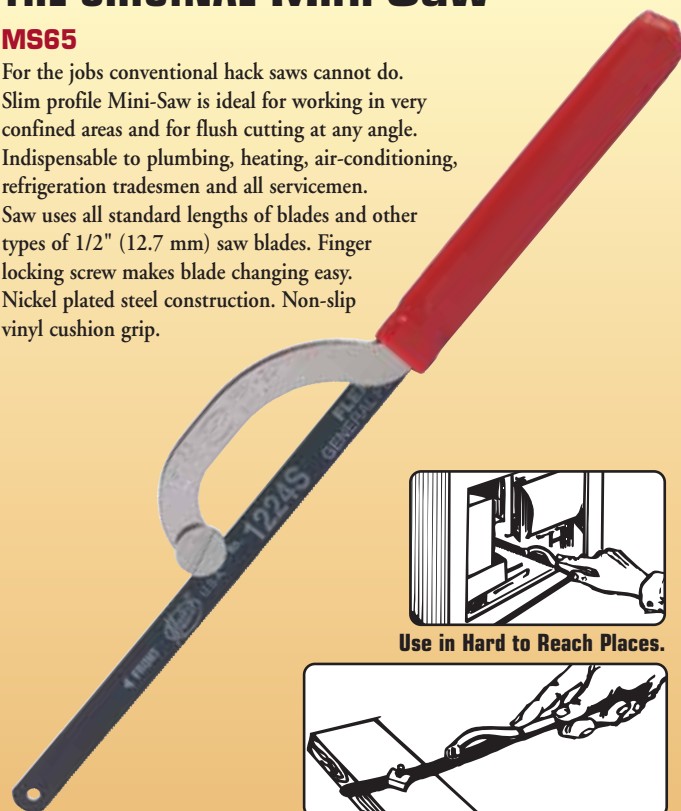


Use in Hard to Reach Places.

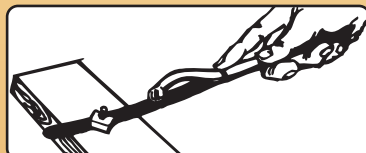

Extend and Flex Blade for Flush Cutting.

Catalog Number	Description	Throat Depth in. (mm)	Net Wt. oz. (g)
HS90	High Tension Hack Saw frame	4-3/8 - 5 (111 - 127)	26 (737)

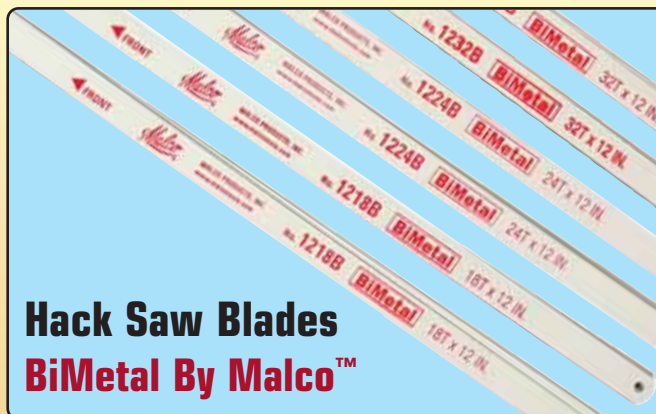

Hack Saw Blades

BiMetal By Malco™

Shatterproof, versatile combination of high speed steel teeth and flexible carbon alloy back assures cleaner, faster, straighter cuts in any type of material. Out performs, outlasts standard carbon and high speed steel blades.

Catalog Number	Length in. (mm)	Width in. (mm)	Teeth Per in. (25.4 mm)	Thickness in. (mm)
1218B	12 (305)	1/2 (12.7)	18	.025 (0.64)
1224B	12 (305)	1/2 (12.7)	24	.025 (0.64)
1232B	12 (305)	1/2 (12.7)	32	.025 (0.64)

HIGH SPEED MOLYBDENUM STEEL

1224F	12 (305)	1/2 (12.7)	24	.025 (0.64)
1232F	12 (305)	1/2 (12.7)	32	.025 (0.64)

GENERAL PURPOSE CARBON STEEL

1218S	12 (305)	1/2 (12.7)	18	.025 (0.64)
1224S	12 (305)	1/2 (12.7)	24	.025 (0.64)
1232S	12 (305)	1/2 (12.7)	32	.025 (0.64)

