




1/2" SPACED BASEBOARD RETURN GRILLE SPECIFICATION CHART

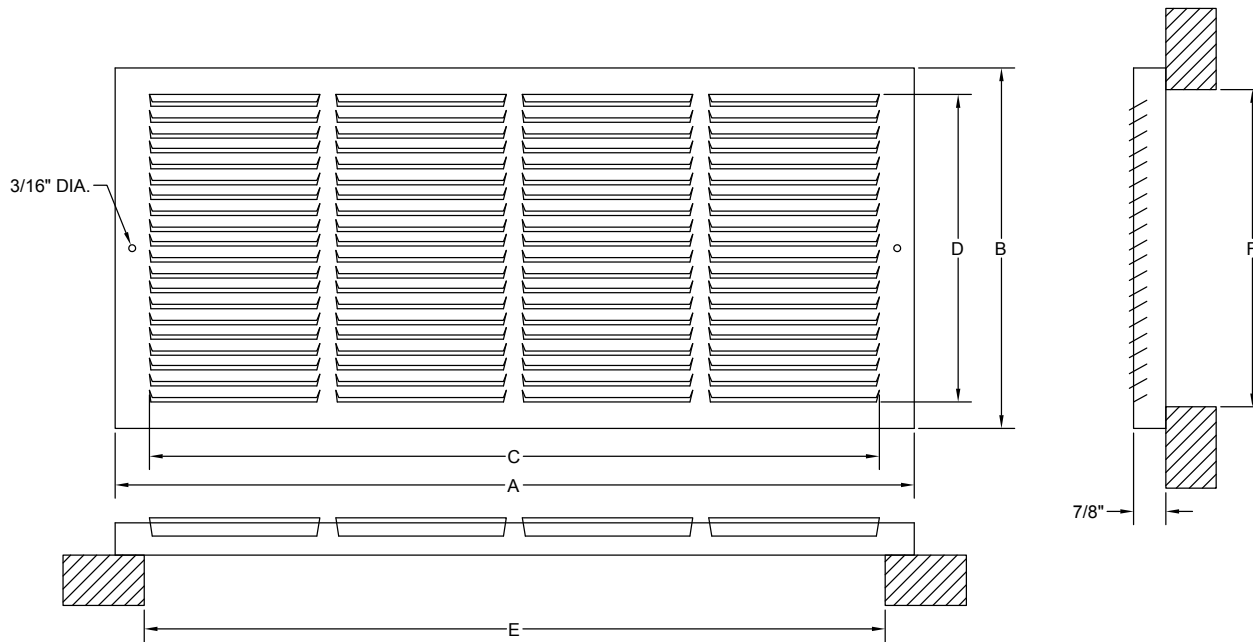

- Heavy Gauge Steel Construction
- 1/2" Louver Spacing
- Finish: White

1/2" Spaced Baseboard Return Grille Dimensional Chart

Size ExF	Dimensions (See Detail Sketches)				Size ExF	Dimensions (See Detail Sketches)			
	A	B	C	D		A	B	C	D
14x6	15.75	7.75	13.50	5.91	24x8	25.75	9.75	23.50	7.91
14x8	15.75	9.75	13.50	7.91	24x10	25.75	11.75	23.50	9.91
14x10	15.75	11.75	13.50	9.91	30x6	31.75	7.75	29.50	5.91
16x6	17.75	7.75	15.50	5.91	30x8	31.75	9.75	29.50	7.91
16x8	17.75	9.75	15.50	7.91	30x10	31.75	11.75	29.50	9.91
20x6	21.75	7.75	19.50	5.91	30x12	31.75	13.75	29.50	11.91
20x8	21.75	9.75	19.50	7.91	36x6	37.75	7.75	35.50	5.91
24x6	25.75	7.75	23.50	5.91	36x8	37.75	9.75	35.50	7.91

1/2" Spaced Baseboard Return Grille Dimensional Chart

Face Velocity		300	400	500	600	700
14x6	cfm	117	156	195	234	273
Ak=0.42	Ps	0.020	0.032	0.052	0.076	0.108
14x8	cfm	156	208	260	312	364
Ak=0.54	Ps	0.020	0.032	0.052	0.076	0.104
14x10	cfm	198	264	330	396	462
Ak=0.67	Ps	0.020	0.032	0.052	0.072	0.100
16x6	cfm	144	192	240	288	336
Ak=0.48	Ps	0.020	0.032	0.052	0.076	0.108
16x8	cfm	186	240	310	372	434
Ak=0.62	Ps	0.020	0.032	0.052	0.076	0.104
20x6	cfm	174	232	290	348	406
Ak=0.58	Ps	0.020	0.032	0.052	0.076	0.104
20x8	cfm	228	304	380	456	532
Ak=0.76	Ps	0.020	0.032	0.052	0.076	0.104
24x6	cfm	201	268	335	402	469
Ak=0.68	Ps	0.020	0.032	0.052	0.076	0.104
24x8	cfm	267	356	445	534	623
Ak=0.89	Ps	0.020	0.032	0.052	0.076	0.100
24x10	cfm	330	440	550	660	770
Ak=1.10	Ps	0.020	0.032	0.052	0.072	0.100
30x6	cfm	249	332	415	498	581
Ak=0.83	Ps	0.020	0.032	0.052	0.076	0.100
30x8	cfm	328	437	547	656	765
Ak=1.12	Ps	0.020	0.032	0.052	0.072	0.100
30x10	cfm	408	544	680	816	952
Ak=1.36	Ps	0.020	0.032	0.052	0.072	0.100
30x12	cfm	486	648	810	972	1134
Ak=1.62	Ps	0.016	0.032	0.048	0.072	0.096
36x6	cfm	300	400	500	600	700
Ak=1.00	Ps	0.020	0.032	0.052	0.076	0.100
36x8	cfm	393	524	655	786	917
Ak=1.31	Ps	0.020	0.032	0.052	0.072	0.100

Ps (in. H₂O)