


NOTHING GETS PAST US



TO LEARN MORE ABOUT OUR ELITE LINEUP OF WATER BASED AND SOLVENT BASED SEALANT SOLUTIONS GO TO POLYMERADHESIVES.COM/PRODUCTS/

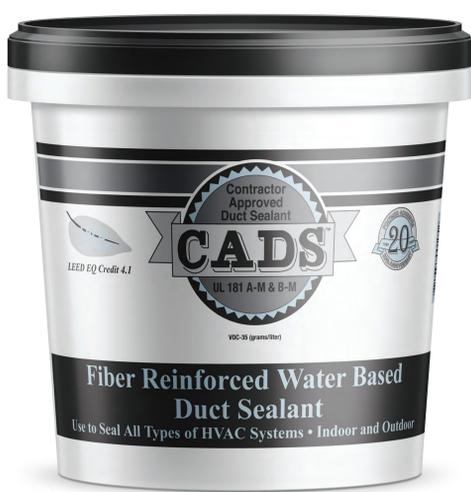

CADS

FIBER REINFORCED DUCT SEALANT USED TO PRESSURE SEAL ALL TYPES OF HVAC SYSTEMS INCLUDING: METAL, AND FLEXDUCT.

- UL 181 AM & BM LISTED FOR ALL TYPES OF DUCT SYSTEMS
- FIBER REINFORCED FOR ADDITIONAL STRENGTH
- EXCEEDS SMACNA PRESSURE AND SEALING CLASSES

SOLIDS CONTENT: 67%
COVERAGE: 80ft² PER GALLON

AVAILABLE IN: 1gal, 2gal, 5gal PAILS



LEED EQ CREDIT 4.1



INDOOR / OUTDOOR



FIBROUS TEXTURE



EXCELLENT MOLD / MILDEW PROTECTION



FREEZE / THAW STABLE

AIRSEAL ZERO

SOLVENT BASED, HIGH VELOCITY DUCT SEALANT USED TO PRESSURE SEAL ALL TYPES OF HVAC SYSTEMS INCLUDING: METAL, FIBERGLASS DUCTBOARD.

- 0 REPORTABLE VOC'S • DRIES TO TOUCH IN MINUTES
- EXCELLENT ADHESION • CURES TO A TOUGH, FLEXIBLE FILM
- EXCEEDS ALL SMACNA PRESSURE AND SEALING CLASSES

SOLIDS CONTENT: 76%
COVERAGE: 80ft² PER GALLON

AVAILABLE IN: 10.5 oz TUBES • 1gal PAILS



LEED EQ CREDIT 4.1



INDOOR / OUTDOOR



**POLYMER
ADHESIVES**

AIRSEAL 11

PREMIUM WATER BASED DUCT SEALANT PROVIDING COMMERCIAL GRADE STRENGTH FOR THE TOUGHEST APPLICATIONS. OUR FINEST DUCT SEALANT.

- EXCEPTIONAL FLEXIBILITY AND ADHESION • HIGH SOLIDS FORMULATION
- UL 181 AM & BM LISTED FOR USE ON HIGH VELOCITY DUCT SYSTEMS
- EXCEEDS ALL SMACNA PRESSURE AND SEALING CLASSES
- 0 SLUMP (ASTM D2202) • 16" WATER COLUMN PRESSURE

SOLIDS CONTENT: 73%
COVERAGE: 100ft² PER GALLON

AVAILABLE IN: 10.5 oz TUBES
1gal, 2gal, 5gal PAILS



AIRSEAL 22

WATER BASED SEALANT RATED FOR ALL TYPES OF SEALING ALL HVAC DUCT SYSTEMS INCLUDING: METAL, FIBERGLASS DUCTBOARD AND FLEXDUCT.

- UL 181 AM & BM LISTED FOR ALL TYPES OF DUCT SYSTEMS • FAST DRY TIME
- CURES TO A TOUGH, FLEXIBLE FILM • EXCEEDS ALL SMACNA CLASSES

SOLIDS CONTENT: 70%
COVERAGE: 80ft² PER GALLON

AVAILABLE IN: 10.5 oz TUBES
1gal, 2gal, 5gal PAILS



AIRSEAL 33

FIBER REINFORCED WATER BASED DUCT SEALANT OFFERING EXCEPTIONAL ADHESION AND FLEXIBILITY FOR ALL TYPES OF HVAC SYSTEMS.

- UL 181 AM & BM LISTED FOR ALL TYPES OF DUCT SYSTEMS • FAST DRY TIME
- CURES TO A TOUGH, FLEXIBLE FILM • HIGH SOLIDS FORMULATION
- EXCEEDS ALL SMACNA PRESSURE AND SEALING CLASSES

SOLIDS CONTENT: 70%
COVERAGE: 80ft² PER GALLON

AVAILABLE IN: 10.5 oz TUBES
1gal, 2gal, 5gal PAILS

