

More award winning products from RGF



REME HALO™ or Reflective Electro Magnetic Energy utilizes an electromagnetic energy cell to create ionized hydro peroxides™, a friendly oxidizer plasma made from oxygen and humidity. This air purifying plasma is propelled into the HVAC duct or plenum by a silent plasma propulsion module that has no moving parts, yet propels the plasma at 2 cfm. This provides for fan or blower-less operation on a 24-hour basis. The purifying plasma will be propelled through the ducts whether the fan or blower is on or not.




The GUARDIAN AIR QR+™ by RGF Environmental Group is designed to help eliminate sick building syndrome risks by reducing odors, air pollutants, and cold and virus causing germs through a patent pending Photohydroionization® (PHI) process. The PHI Cells are easily mounted into existing air conditioning and heating systems. When the HVAC system is in operation, the PHI Cell uses an Advanced Oxidation Process to reduce airborne contaminants.



The Guardian Air Plug In Natural Air Purification System provides bacteria, mold, odor and VOCs (chemical odors) reduction. The advantage of the Guardian Air Plug In is its ability to be used in any room and be completely inconspicuous. The Guardian Air Plug In plugs directly into a wall outlet and can be used with or without its internal fan. Because it has its own outlets as part of the unit, you do not lose the wall outlet. The Guardian Air Plug In is an air treatment system not a filter.



The all new high-quality BLU-QR™ stick light has updated features including our exclusive quick-release lamp, which allows for no tools lamp replacement. It comes standard with four mounting options right in the box, including the easy-to-install magnetic mount and multiple through plate mounting styles. The BLU-QR™ is priced very economically and provides UV light disinfection and protection to the AC coil surfaces from bacteria, virus, mold growth and odors. This results in a cleaner and more efficient energy-saving system.



The Package Unit by RGF features the same technology as the Guardian Air but is designed to fit into smaller HVAC systems such as roof top package units and anywhere duct work is inaccessible.



QUAD-DM™ Ion Generator Air Purification System

The QUAD-DM™ Ion Generator for In-Duct HVAC units was developed to produce bi-polar ions in the conditioned space of homes and commercial buildings. This system has separated quad ion emitters for superior Bi-Polar ionization. The QUAD-DM™ reduces particulate, allergens, smoke, bacteria, viruses and mold spores. This unit is designed to be mounted in the HVAC air handler and installed using its no tools required magnetic mount for quick and easy installation. The QUAD-DM™ is a good air quality solution for the budget minded consumer.




NOTE: Please take time to read the attached assembly instructions. All instructions and precautions should be adhered to while operating this system.

RGF® Environmental Group, Inc.© Copyright 2015
www.rgf.com


QUAD-DM 8-2015

Conforms to:UL-867:2011
C22.2 187-M1986
EN 60335-1/A15:2011 EN 60335-2-65/A1:2008



Thank you for purchasing the QUAD-DM™ by RGF® Environmental Group, Inc.
We are confident this system will provide you with years of Fresh, Clean Air!!!

Efficient ion dispersion and mixing via Bernoulli's effect

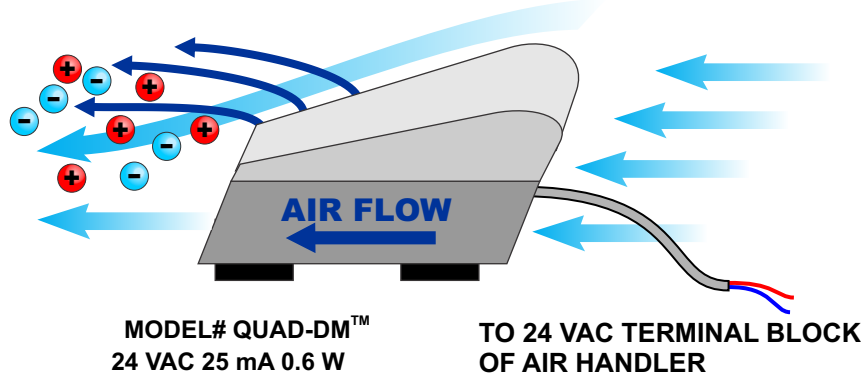


Electrical Connection of QUAD-DM™ Unit

WARNING: BE SURE POWER IS DISCONNECTED FROM HVAC UNIT BEFORE ATTEMPTING TO CONNECT QUAD-DM™ UNIT TO POWER SOURCE

RGF suggests a licensed technician make connection of power to the QUAD-DM™ unit. The QUAD-DM™ should be connected to the 24 VAC terminal of the air handler.

Mounting QUAD-DM™ Unit

The QUAD-DM™ is designed to be mounted via magnetic feet to inside of the air handler. The magnetic feet articulate so the unit can be mounted to a curved surface such as a blower housing.

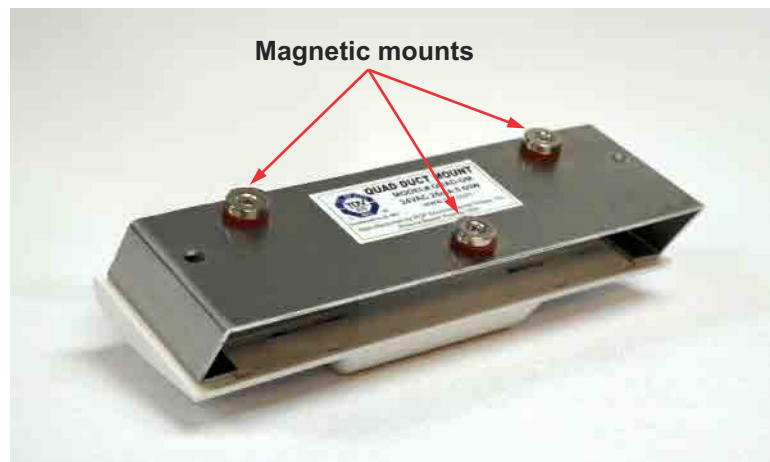

See included warranty registration card for warranty information

The QUAD-DM™ should be mounted in the air flow of the blower and in the direction indicated by the arrow on the side of the metal bracket.



In cases where the QUAD-DM™ unit must be mounted to a non-metallic surface, the magnetic feet can be removed and replaced with supplied double-sided tape. Please ensure both surfaces are clean by using supplied alcohol swab.



QUAD-DM™ mounted to blower housing