
VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD, HOUSTON, TEXAS 77041, U.S.A

INTERNET ADDRESS: www.vimco.biz

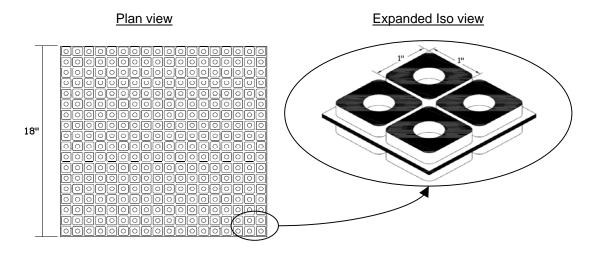

MODEL	SIZE		
	(inches)		
ECRMP 181834	18" x 18" x 3/4"		
ECRMP 121234	12" x 12" x 3/4"		
ECRMP 101034	10" x 10" x 3/4"		
ECRMP 080834	8" x 8" x 3/4"		
ECRMP 060634	6" x 6" x 3/4"		
ECRMP 040434	4" x 4" x 3/4"		
ECRMP 030334	3" x 3" x 3/4"		
ECRMP 020234	2" x 2" x 3/4"		
ECRMP 010134	1" x 1" x 3/4"		
ECRMP SSSS34	SPECIAL (contact factory)		

APPLICATION

* Wherever bolting is to be avoided and minor, non-critical vibration conditions exist. (pumps, motors, airconditioning units, generators etc.)

NOTES

- 1. Material: High quality ozone and water resistant 55 duro elastomer blend
- 2. Maximum loading: 60 lbs/sq.in.
- 3. Working range: 15 to 55 lbs/sq.in.

FEATURES

- * "Waffle pad" design with inbuilt suction cups.
- * "Easy-Cut" (by hand!) design allows flexibility of pad size to suit job site requirements.
- * No bolting required.
- * Simple field installation.
- * New 1" modules offer greater versatility to cut to exact size requirements to match equipment base e.g. 2"x2", 3"x3", 2"x5" size pads etc.

	100	П		ТТТ		
	80					
(PSI)	60				MAX	
LOAD (PSI)	40					
	20					
	0	•	.05	.10	.15	.20

Notes / Remarks :	Project :	Title:	ECRMP	Drawing no.
	Client :		Easy-Cut Rubber	S-2200.21
	Consultant :		Mounting Pad	
	Representative :			Rev. 3