


355AAV Evolution™ High Efficiency Gas Furnace
Deluxe 4-Way Multipoise Variable-Speed
Two-Stage Condensing Gas Furnace
Series 120 Input Rates: 40,000 thru 120,000 Btuh



Product Data

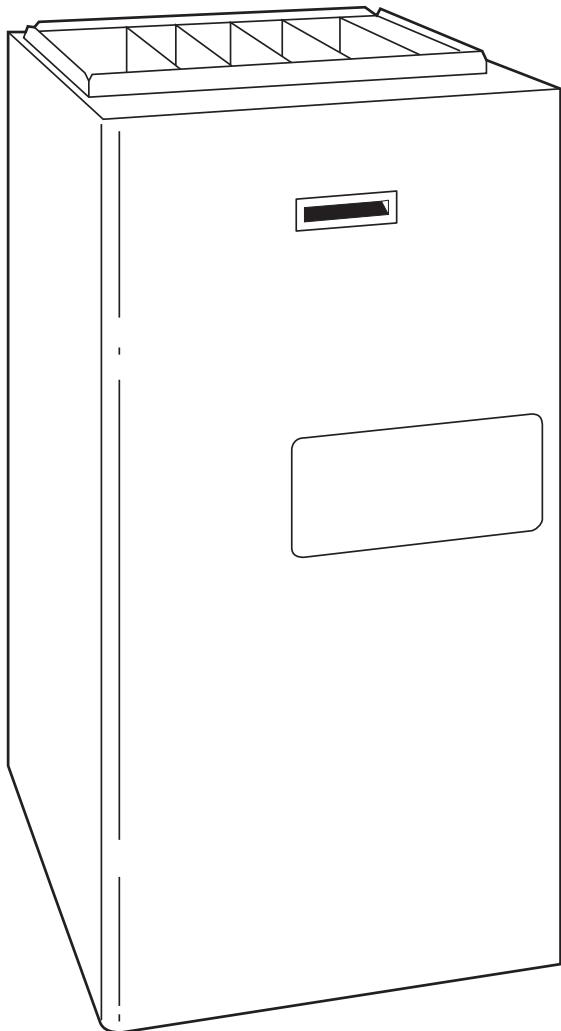

A05085



PERFECT HEAT™ TECHNOLOGY, THE ULTIMATE IN HEATING COMFORT . . .

The Bryant Evolution™ with Perfect Heat™ technology achieves the optimum combination of comfort and efficiency.

The Evolution™ achieves industry-leading ultra-high efficiency at up to 96.6 percent Annual Fuel Utilization Efficiency (AFUE). Efficient performance is enhanced through the variable-speed design. To maintain ideal comfort, Perfect Heat™ technology automatically adjusts the heating level, maximizing the use of low heating levels that produce near silent furnace operation while meeting the exact heating needs. This unit is designed to keep the indoor temperature within less than 1 degree of the thermostat setpoint. Because it operates in low heat most of the time, the Evolution™ uses up to 80% less power than single-capacity furnaces.

In addition to providing ultimate comfort, the Evolution™ has a sealed combustion system. This system brings combustion air to the furnace and vents flue gases outside the furnace in a safe manner. Because it is sealed, operational noise is minimal. A sealed combustion system also means fewer cold drafts and less air infiltration.

The Evolution™ is available in 6 heat/airflow combinations. The unit has a 4-way multipoise design and can be installed in upflow, downflow, or horizontal positions covering up to 24 different applications. The Evolution™ can be vented as a Direct vent/2-pipe furnace or as a non-direct vent/1-pipe application.

The versatile 4-way multipoise design in conjunction with variable speed makes the Evolution™ ideal for use with split system cooling, including 2-speed units. A Bryant Evolution™ air purifier, humidifier, comfort ventilator, and Comfort Zone II control will provide year round comfort and efficiency.

Designed for durability, comfort, and reliability, the Evolution™ is the ultimate in versatile, efficient comfort.

Bryant Evolution® System — When the Evolution™ variable-speed gas furnace is matched with the Evolution™ Control and an air conditioner or heat pump, the homeowner will experience the ultimate in Perfect Heat™ and Perfect Humidity™ through unparalleled control of temperature, humidity, indoor air quality, and zoning. The Bryant Evolution™ System also provides unprecedented ease of use through onscreen, text-based service reminders and equipment malfunction alerts.

For even greater comfort and convenience, match the Evolution™ furnace with an Evolution air conditioner or heat pump. This will create a fully communicating system, requiring only 4 thermostat wires between system components. In some cases, troubleshooting can even be done from the outdoor unit without entering the home. Optional remote access through telephone or Internet is also available when combined with a remote connectivity kit.

EVOLUTION™ FEATURES / BENEFITS

Perfect Humidity™—The Perfect Humidity system actively controls both temperature and humidity in the home to provide the best comfort all year long. Other systems depend on heating or cooling demand to manage the moisture in the air. But, Perfect Humidity™ gives the homeowner the right amount of humidity day and night, even in mild weather. No other manufacturer can do this! Perfect Humidity saves energy, too. By keeping humidity under control, the homeowner can set their thermostat to stay comfortable and save energy—up to 20% off their cooling costs!

Perfect Heat™—On the coldest days of the year, the Evolution™ Furnace has the capacity to heat the home. On moderate days when less heat is required, this furnace will regulate itself to a lower capacity—providing a comfortable home and minimizing operating costs.

The patented algorithm adjusts the low heat operating time to match the indoor conditions.

Reliable Heat Exchanger Design—The primary heat exchanger is made of aluminized steel for corrosion resistance. The patented Everlastic™ condensing heat exchanger cells are laminated with polypropylene for greater resistance to corrosion and epoxy coated externally to prevent oxidation. This break-through in heating technology helps extend the life of the furnace for years of dependable performance. The heat exchanger is positioned in the furnace to extract additional heat. Stainless steel coupling box componentry between heat exchangers has exceptional corrosion resistance in natural gas and propane applications.

Perfect Light™ Igniter—Bryant's unique SiN igniter is not only physically robust but it is also electrically robust. It is capable of running at line voltage and does not require complex voltage regulators as do other brands. This unique feature further enhances the reliability of Evolution™ gas furnace and continues Bryant's tradition of technology leadership and innovation in providing a reliable and durable product.

FanOn™—Improves comfort all year long by allowing selection of the continuous fan speed right at the thermostat.

SmartEvap™—Allows the system to reduce summertime humidity levels by nearly 10% over standard systems.

Media Filter Cabinet—Enhanced indoor air quality in the home is made easier with our media filter cabinet—a standard accessory on all deluxe furnaces. When installed as a part of the system, this cabinet allows for easy and convenient addition of a Bryant high efficiency air filter.

Perfect Heat™ Control Center—The microprocessor control center features state-of-the-art combustion, temperature, and airflow control to maximize comfort while operating at peak efficiency.

Combustion control is obtained by taking the inducer motor RPM reading when the medium-heat pressure switch makes. Using this information, the microprocessor maintains a consistent air-to-fuel ratio independent of vent sizing and conditions during all phases of heat.

The first cycle after power reset provides 16 minutes of low heat before switching to high heat unless the room thermostat has been

satisfied. Subsequent thermostat cycles provide anywhere from 0 to 16 minutes of low or medium heat depending on the length of the previous thermostat cycle.

Airflow control is accomplished by the microprocessor and blower motor. The ECM blower motor is configured by the microprocessor to react to changes in the static load on the air delivery system. The ECM blower uses this information to deliver correct airflow independent of variations in system restrictions. (For example, dirty filter or zone damper changes during a cycle.)

A special dehumidification function allows direct input from a thermidistat or humidistat. This input adjusts system airflow for greater humidity removal and increased cooling comfort during summer months.

Direct Venting or Optional Ventilated Combustion Air—The Evolution™ can be installed as a 2-pipe (Direct Vent) furnace or as a non-direct vent/1-pipe application. This provides added flexibility to meet diverse installation needs.

Electronic Variable-Speed Motors—ECM Motors (Electronically Commutated Motor) provide variable-speed operation to optimize comfort levels in the home year round. They are also more economical to operate than standard motors.

Sealed Combustion System—Evolution™ brings in combustion air from outside the furnace, which results in especially quiet operation.

Insulation—Foil-faced insulation in heat exchanger section of the casing minimizes heat loss.

Insulated Blower Compartment—The acoustical insulation reduces air and motor noise for quiet operation.

Monoport Burners—The burners are finely tuned for smooth, quiet combustion and economical operation.

Bottom Closure—Factory-installed for side return; easily removable for bottom return.


Blower Access Panel Switch—Automatically shuts off 115-v power to furnace whenever blower access panel is opened.

Quality Registration—The Evolution™ is engineered and manufactured under an ISO 9001 registered quality system.

Certifications—The Evolution™, Model 355AAV units are CSA (A.G.A. and C.G.A.) design certified for use with natural and propane gases. The furnace is factory-shipped for use with natural gas. A CSA listed gas conversion kit is required to convert furnace for use with propane gas. The efficiency is GAMA efficiency rating certified. The Evolution™ meets California Air Quality Management District emission requirements.

These furnaces are not approved for installation in mobile homes.

FURNACE COMPONENTS

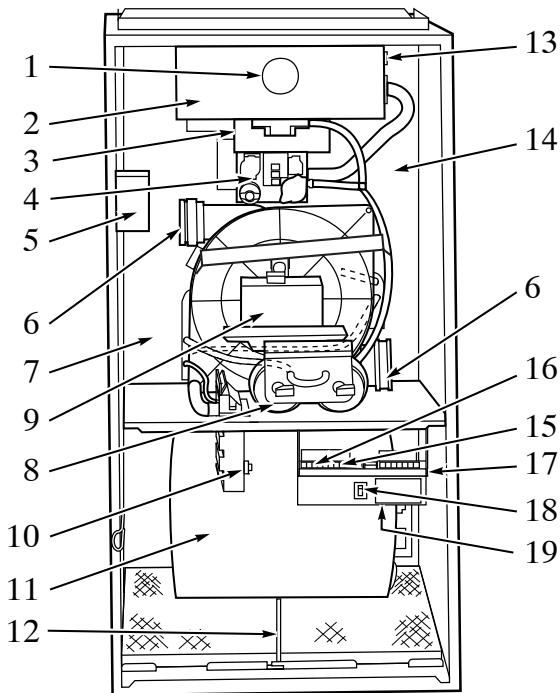

A02287

355AAV

NOTE:

- The 355AAV Furnace is built for use with natural gas. The furnace can be converted for propane gas with a factory-authorized and listed accessory conversion kit.
- Control location and actual controls may be different than shown above.

- Burner sight glass for viewing burner flame.
- Burner assembly (inside). Operates with energy-saving, inshot burners and hot surface igniter for safe, dependable heating.
- Combustion-air intake connection to ensure contaminant-free air (right or left side).
- Redundant 2-stage gas valve. Safe, efficient. Features one gas control with two internal shutoff valves.
- Junction box for 115-v electrical power supply.
- Vent outlet. Uses PVC pipe to carry vent gases from the furnace's combustion system (right or left side).
- Secondary condensing heat exchanger (inside). Wrings out more heat through condensation. Constructed with patented Polypropylene-laminated steel to ensure durability.
- Pressure switches ensure adequate flow of flue products through furnace and out vent system.
- Inducer motor. Pulls hot flue gases through the heat exchangers, maintaining negative pressure for added safety.
- Condensate drain connection. Collects moisture condensed during combustion process.
- Heavy-duty blower. Circulates air across the heat exchangers to transfer heat into the home.
- Air filter and retainer. May be used for side return application.
- Rollout switch (manual reset) to prevent overtemperature.
- Primary serpentine heat exchanger (inside). Stretches fuel dollars with the S-shaped heat-flow design. Solid construction of corrosion-resistant aluminized steel means reliability.
- 3-amp fuse provides electrical and component protection.
- Light emitting diodes (LEDs) on control center. Code lights are for diagnosing furnace operation and service requirements.
- Perfect Heat™ Control Center.
- Blower access panel safety interlock switch.
- Transformer (24v) behind control center provides low-voltage power to furnace control and thermostat.

BRYANT ACCESSORIES

355AAV

DESCRIPTION	PART NO.	UNIT SIZE					
		042040	042060	042080	060080	060100	060120
Vent Termination Kit (Bracket Only for 2 Pipes)	2-in. — KGAVT0101BRA 3-in. — KGAVT0201BRA	X	X	X	X	X	X
Concentric Termination Kit (Single Exit)	2-in. — KGAVT0701CVT 3-in. — KGAVT0801CVT	X	X	X	X	X	X
Condensate Freeze Protection Kit	KGAHT0101CFP	X	X	X	X	X	X
Condensate Neutralizer Kit (obtained thru RCD)	P908-0001	X	X	X	X	X	X
Evolution Air Purifier	Model GAPA	X	X	X	X	X	X
Condensate Neutralizer Kit (obtained thru RCD)	P908-0001	X	X	X	X	X	X
Electronic Air Cleaner	Model EACB	X	X	X	X	X	X
Mechanical Air Cleaner	Model FILCAB or EZXCAB	X	X	X	X	X	X
Humidifier	Model HUM	X	X	X	X	X	X
Heat Recovery Ventilator	Model HRV	X	X	X	X	X	X
Energy Recovery Ventilator	Model ERV	X	X	X	X	X	X
UV Lights	Model UVL	X	X	X	X	X	X
EZ Flex Media Filter with end caps – 16-in. (406 mm) (9 pack)	EXPXXLMC0016		X				
EZ Flex Media Filter with end caps – 20-in. (508 mm) (9 pack)	EXPXXLMC0020			X	X	X	
EZ Flex Media Filter with end caps – 24-in. (610 mm) (6 pack)	EXPXXLMC0024	X					X
Replacement EZ Flex Filter – 16-in. (406 mm) (10 pack)	EXPXXFIL0016		X				
Replacement EZ Flex Filter – 20-in. (508 mm) (10 pack)	EXPXXFIL0020			X	X	X	
Replacement EZ Flex Filter – 24-in. (610 mm) (10 pack)	EXPXXFIL0024						X
Exterior Filter Rack – Universal, 1" (19 mm) (adjustable from 14" to 24") with filter	KGAFR0301ALL KGAFR0306ALL (6-pack)	X	X	X	X	X	
Unframed Filter 3/4-in. (19 mm) — 16 x 25 (406 x 635)	KGAWF1301UF KGAWF1306UFR (6 pack)	X	X	X	X	X	
Unframed Filter 3/4-in. (19 mm) — 20 x 25 (508 x 635)	KGAWF1401UFR KGAWF1406UFR (6 pack)			X	X	X	
Combustible Floor Base (Not required when evaporator coil case is used.)	KGASB0301ALL	X	X	X	X	X	

* Factory-authorized and field-installed. Gas conversion kits are CSA (AGA/CGA) recognized.

S 16 x 25 (406.4 x 635.0 mm) filters suitable for side return on all furnace sizes.

X – Accessory

BRYANT ACCESSORIES (CONTINUED)

355AAV

DESCRIPTION	PART NO.	UNIT SIZE					
		042040	042060	042080	060080	060100	060120
Natural – To – Propane Gas Conversion Kit (Single Kit)*	KGANP4601ALL	X	X	X	X	X	X
Propane – To – Natural Gas Conversion Kit (Single Kit)	KGAPN3901ALL	X	X	X	X	X	X
ECM Motor Simulator (replaces the ECM motor to aid troubleshooting)	KGASD0301FMS	X	X	X	X	X	X
Door Gasket Kit	KGBAC0110DGK	X	X	X	X	X	X
Advanced Product Monitor (software and hardware to link PC laptop to control board)	KGAFD0301APM	X	X	X	X	X	X
ECM Control Replacement Module – 1/2 HP	HK44EA122	X	X	X			
ECM Control Replacement Module – 1 HP	HK52EA122				X	X	X
Gas Orifice Kit Size 42 (Qty 50)	KGaha0150N42						
Gas Orifice Kit Size 43 (Qty 50)	KGaha0250N43						
Gas Orifice Kit Size 44 (Qty 50)	KGaha0350N44						
Gas Orifice Kit Size 45 (Qty 50)	KGaha0450N45						
Gas Orifice Kit Size 46 (Qty 50)	KGaha0550N46						
Gas Orifice Kit Size 47 (Qty 50)	KGaha1550N47						
Gas Orifice Kit Size 48 (Qty 50)	KGaha850N48						
Gas Orifice Kit Size 54 (Qty 50)	KGaha0850P54						
Gas Orifice Kit Size 55 (Qty 50)	KGaha0750P55						
Gas Orifice Kit Size 56 (Qty 50)	KGaha0850P56						
Gas Orifice Kit Size 1.25mm (Qty 50)	KGaha05750125						
Gas Orifice Kit Size 1.30mm (Qty 50)	KGaha5750130						

* Factory – authorized and field – installed. Gas conversion kits are CSA (AGA/CGA) recognized.

S 16 x 25 (406.4 x 635.0 mm) filters suitable for side return on all furnace sizes.

X – Accessory

See Installation Instructions for model, altitude, and heat value usages.

THERMOSTAT AND ZONING CONTROL OPTIONS

NON-PROGRAMMABLE THERMOSTAT SELECTION

TC-NAC or TP-NAC	For use with 1 speed Air Conditioner – °F/°C, Auto Changeover
TC-NHC or TP-NHC	For use with 1 speed Air Conditioner – °F/°C, Auto Changeover
TP-NRH*	For use with 2 speed Air Conditioner – °F/°C, Auto Changeover

* Model HP & 2 Stage thermostat must be field converted to air conditioner operation.

PROGRAMMABLE THERMOSTAT SELECTION

TP-PAC	For use with 1 speed Air Conditioner – °F/°C, Auto Changeover, 7–Day Programmable
TP-PHP*	For use with 1 speed Air Conditioner – °F/°C, Auto Changeover, 7–Day Programmable
TP-PRH*	For use with 2 speed Air Conditioner – °F/°C, Auto Changeover, 7–Day Programmable
TB-PAC	For use with 1 speed Air Conditioner – °F/°C, Auto Changeover, 5–2 Programmable
TP-PRH†	For use with two–stage applications – °F/°C, Auto Changeover, 7–Day Programmable
TP-PRH‡	For multi–use/stage configurations – °F/°C, Auto Changeover 7–Day Programmable
SYSTXBBUID01-B	Evolution™ user interface


* Model HP & 2 Stage thermostat must be field converted to air conditioner operation.

† Hybrid Heat™ thermostat is used with furnace and heat pump application.


‡ Thermidistat can be configured for heating, cooling, and Hybrid Heat applications. It must be configured for each specific application.

ZONING CONTROL SELECTION


ZONEBB3Z(AC/HP)01	Zone Perfect Three–Zone Kit
ZONEBB2KIT01-B	Zone Perfect Plus–B 2–Zone Kit
ZONEBB4KIT01-B	Zone Perfect Plus–B 4–Zone Kit
ZONEBB8KIT01-B	Zone Perfect Plus–B 8–Zone Kit
SYSTXBBUIZ01-B	Evolution Zone User Interface
SYSTXBBRRS01	Evolution Remote Room Sensor
SYSTXBBSMS01	Evolution Smart Sensor
SYSTXBB4ZC01	Evolution 4–Zone Damper Control

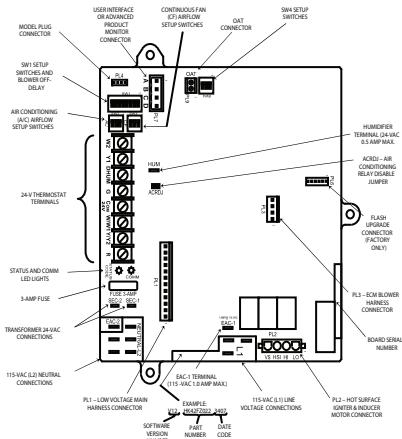


Control Center

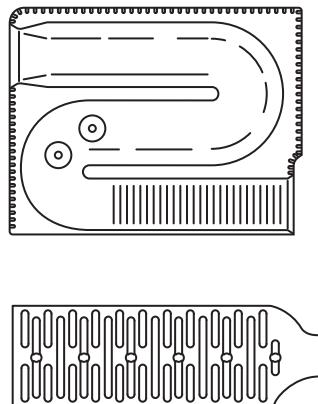

Heat Exchanger

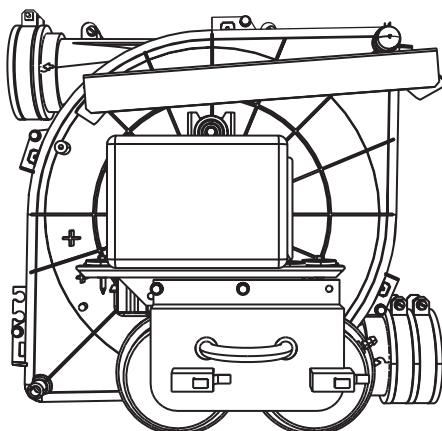


Inducer Assembly

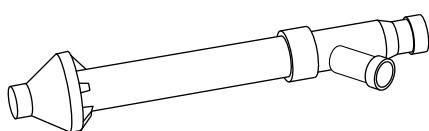

Concentric Vent Kit

A93086


A concentric vent kit allows vent and combustion-air pipes to terminate through a single exit in a roof or side wall. One pipe runs inside the other allowing venting through the inner pipe and combustion air to be drawn in through the outer pipe.

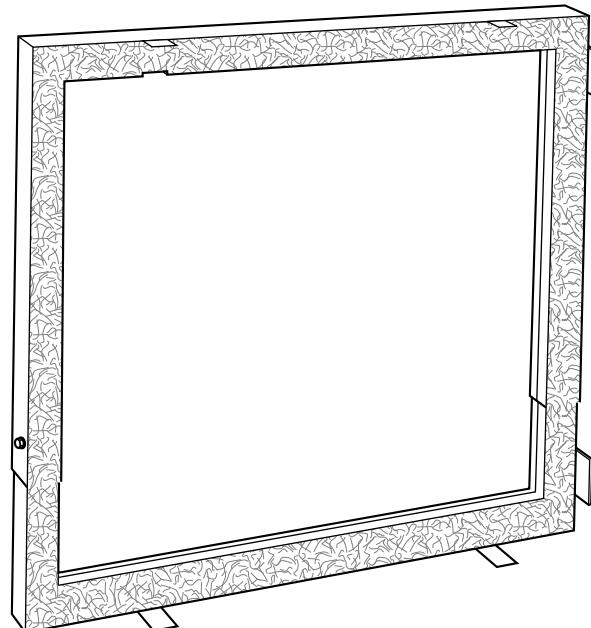

Downflow Subbase


A88202

One base fits all furnace sizes. The base is designed to be installed between the furnace and a combustible floor when no coil box is used or when a coil box other than a Bryant cased coil is used. It is A.G.A. design certified for use with Bryant 355AAV furnaces when installed in downflow applications.

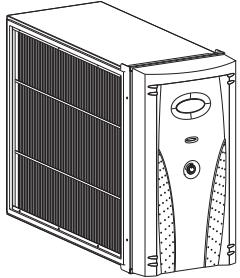


ELECTRONIC OR MECHANICAL AIR CLEANER

Cleans the air of smoke, dirt, and many pollens commonly found. Saves decorating and cleaning expenses by keeping carpets, furniture and drapes cleaner.




HUMIDIFIER

By adding moisture to winter-dry air, a Carrier Humidifier can often improve comfort and keeps woodwork, wallpaper, and paint in better condition. Moisturizing household air also helps to retain normal body heat and provides comfort at lower temperatures.

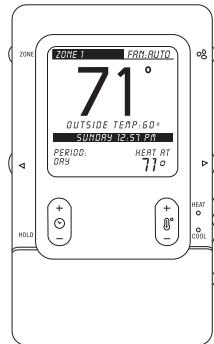

CONTROLS: THERMOSTATS AND ZONING

Available in programmable and non-programmable models, Carrier thermostats maintain a constant, comfortable temperature level in the home.

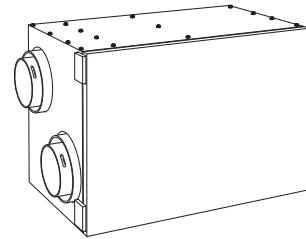

ENERGY/HEAT RECOVERY VENTILATOR

Carrier's energy or heat recovery ventilators exhaust stale indoor air and provide fresh outdoor air to the home while minimizing heat loss and humidity level. Especially useful for today's tighter constructed houses.

Energy recovery ventilator is shown.



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.



ISO 9001
QMI-SAI Global

**Always Ask For
FACTORY AUTHORIZED PARTS**

PHYSICAL DATA

DESCRIPTION	UNIT SIZE					
	042040	042060	042080	060080	060100	060120
Direct-Drive Motor Hp (ECM)	1/2	1/2	1/2	1	1	1
Motor Full Load Amps	7.7	7.7	7.7	12.8	12.8	12.8
RPM (Nominal) — Speeds	Variable 250 — 1300					
Blower Wheel Diameter X Width	11 X 10 (279 X 254)	10 X 7 (254 X 178)	11 X 10 (279 X 254)			
Filter Size – In. (mm) Nominal A (Washable)	(1) 24 X 25 X 3/4 (610 X 635 X 19)	(1) 16 X 25 X 3/4 (406 X 635 X 19)	(1) 20 X 25 X 3/4 (508 X 635 X 19)	(1) 20 X 25 X 3/4 (508 X 635 X 19)	(1) 20 X 25 X 3/4 (508 X 635 X 19)	(1) 24 X 25 X 3/4 (610 X 635 X 19)
Shipping Weight (lb)	205	170	182	204	203	234
Limit Control	SPST					
Heating Blower Control (Off Delay)	Selectable 90, 120, 150, or 180 SEC Intervals					
Burners (Monoport)	2	3	4	4	5	6
Gas Connection Size	1/2-in. NPT					
Gas Valve (Redundant) Manufacturer	White-Rodgers					
Minimum Inlet Pressure (in. wc)	4.5 (Natural Gas)					
Maximum Inlet Pressure (in. wc)	13.6 (Natural Gas)					
Ignition Device	Hot Surface -SiN					

355AAV

PERFORMANCE DATA

UNIT SIZE		042040	042060	042080	060080	060100	060120
Certified Temperature Rise Range (°F/°C)	Low	25–55 (−4–13)	50–80 (10–27)	50–80 (10–27)	50–80 (10–27)	50–80 (10–27)	50–80 (10–27)
	High	30–60 (−1–16)	35–65 (2–18)	35–65 (2–18)	35–65 (2–18)	45–75 (7–24)	45–75 (7–24)
Certified External Static Pressure (ESP)	Heating	0.10	0.12	0.15	0.15	0.20	0.20
	Cooling	0.50	0.50	0.50	0.50	0.50	0.50
Airflow CFM‡	Heating Low	525 (620**)	500 (590**)	705 (830**)	685 (810**)	875 (1030**)	1180 (1390**)
	Heating High	785	1070	1490	1530	1530	1900
	Cooling (Max)	1390	1400	1375	1975	1950	2060
Output Capacity BTUH* (96)	Low	Upflow	25000	37000	49000	49000	61000
		Downflow	25000	36000	49000	49000	61000
		Horizontal	25000	36000	49000	49000	61000
	High	Upflow	38000	57000	75000	75000	94000
		Downflow	37000	56000	75000	75000	94000
		Horizontal	37000	56000	75000	75000	93000
AFUE%* Nonweatherized 96	Upflow	96.6	94.1	94.1	94.1	94.1	94.1
	Downflow	95	92.7	92.7	92.7	92.7	92.7
	Horizontal	96.1	93.7	93.7	93.7	93.7	93.7
Input BTUH†	Low	26000	39000	52000	52000	65000	78000
	High	40000	60000	80000	80000	100000	120000

* Capacity in accordance with U.S. Government DOE test procedures.

† Gas input ratings are certified for elevations to 2000 ft. (610 M). For elevations above 2000 ft. (610 M), reduce ratings 2% for each 1000 ft. (305 M) above sea level.
In Canada, derate the unit 5% for elevations from 2000 to 4500 ft. (610 to 1372 M) above sea level.

‡ Airflow shown is for bottom only return-air supply with factory-supplied 3/4-in. (19 mm) washable filter(s). For air delivery above 1800 CFM, see Air Delivery Table for other options.

** Low- and Medium-heat CFM when low/medium heat rise adjustment switch (SW1–3) on furnace control is used.

AIR DELIVERY - CFM (BOTTOM RETURN WITH FILTER)

Unit Size	Operating Mode	CFM Airflow Setting	External Static Pressure Range*	External Static Pressure (ESP)									
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
042040													
††	Low Heat	540†	0–0.50	525	540	540	540	540					
	High Heat	785†	0–1.0	785	785	780	780	785	780	765	755	745	725
††	1–1/2-Ton A/C Cooling	525	0–0.50‡	465	470	460	460	470					
††	2-Ton A/C Cooling	700	0–0.50‡	635	685	690	685	695					
	2–1/2-Ton A/C Cooling	875	0–1.0‡	875	875	875	875	875	870	860	850	840	820
	3-Ton A/C Cooling	1050	0–1.0	1040	1050	1050	1050	1045	1040	1030	1020	1015	995
	3–1/2-Ton A/C Cooling	1225	0–1.0	1190	1205	1215	1225	1225	1225	1215	1205	1200	1165
	Maximum	1400	0–1.0	1360	1390	1400	1400	1390	1350	1305	1260	1215	1170
042060													
††	Low Heat	500†	0–0.50	500	495	485	460	430					
	High Heat	1070†	0–1.0	1070	1070	1070	1070	1070	1070	1070	1070	1065	1045
††	1–1/2-Ton A/C Cooling	525	0–0.50‡	525	525	510	495	465					
††	2-Ton A/C Cooling	700	0–0.50‡	700	700	700	700	700					
	2–1/2-Ton A/C Cooling	875	0–1.0‡	875	875	875	875	875	875	875	875	860	840
	3-Ton A/C Cooling	1050	0–1.0	1050	1050	1050	1050	1050	1050	1050	1050	1050	1045
	3–1/2-Ton A/C Cooling	1225	0–1.0	1225	1225	1225	1225	1225	1225	1225	1225	1225	1205
	Maximum	1400	0–1.0	1400	1400	1400	1400	1400	1400	1400	1400	1380	1325
042080***													
††	Low Heat	720†	0–0.50	705	705	700	695	695					
	High Heat	1490†	0–1.0	1490	1490	1460	1420	1375	1325	1280	1235	1190	1145
††	1–1/2-Ton A/C Cooling	525	0–0.50‡	515	495	490	475	465					
††	2-Ton A/C Cooling	700	0–0.50‡	685	680	670	665	665					
	2–1/2-Ton A/C Cooling	875	0–1.0‡	830	840	850	860	860	855	840	830	825	820
	3-Ton A/C Cooling	1050	0–1.0‡	1050	1050	1050	1050	1050	1045	1040	1025	1015	1000
	3–1/2-Ton A/C Cooling	1225	0–1.0‡	1225	1225	1225	1225	1225	1225	1225	1225	1185	1140
	Maximum	1400	0–1.0‡	1400	1400	1400	1400	1375	1325	1280	1235	1190	1145
060080***													
††	Low Heat	705†	0–0.50	685	655	660	660	660					
	High Heat	1530†	0–1.0	1530	1530	1530	1530	1530	1530	1525	1520	1500	1485
††	2-Ton A/C Cooling	700	0–0.50‡	670	640	635	630	630					
††	2–1/2-Ton A/C Cooling	875	0–0.50‡	870	875	865	865	865					
	3-Ton A/C Cooling	1050	0–1.0‡	1050	1045	1040	1045	1045	1050	1050	1050	1045	1040
	3–1/2-Ton A/C Cooling	1225	0–1.0‡	1225	1225	1225	1225	1225	1225	1225	1225	1225	1225
	4-Ton A/C Cooling	1400	0–1.0‡	1330	1345	1360	1375	1380	1380	1380	1370	1365	1355
	5-Ton A/C Cooling	1750	0–1.0	1750	1750	1750	1750	1750	1750	1745	1725	1700	1685
	Maximum	2000	0–1.0	2000	2000	2000	2000	1975	1955	1920	1870	1820	1770
060100***													
††	Low Heat	890†	0–0.50	875	890	890	890	890					
	High Heat	1530†	0–1.0	1530	1530	1530	1530	1530	1530	1525	1515	1505	1490
††	2-Ton A/C Cooling	700	0–0.50‡	700	690	690	690	690					
††	2–1/2-Ton A/C Cooling	875	0–0.50‡	835	845	855	860	865					
	3-Ton A/C Cooling	1050	0–1.0‡	1050	1050	1050	1050	1050	1050	1050	1050	1050	1050
	3–1/2-Ton A/C Cooling	1225	0–1.0‡	1170	1190	1205	1220	1225	1225	1225	1225	1225	1225
	4-Ton A/C Cooling	1400	0–1.0‡	1400	1400	1400	1400	1400	1400	1400	1400	1400	1375
	5-Ton A/C Cooling	1750	0–1.0	1735	1740	1735	1735	1725	1720	1710	1695	1680	1660
	Maximum	2000	0–1.0	1995	1985	1980	1965	1950	1935	1910	1885	1860	1815
060120													
	Low Heat	1200†	0–1.0	1180	1185	1190	1200	1200	1200	1200	1200	1200	1200
	High Heat	1900†	0–1.0	1900	1900	1900	1900	1900	1885	1875	1860	1840	1815
††	2-Ton A/C Cooling	700	0–0.50‡	700	700	700	700	695					
††	2–1/2-Ton A/C Cooling	875	0–0.50‡	870	875	875	865	870					
	3-Ton A/C Cooling	1050	0–1.0‡	1025	1035	1045	1050	1050	1050	1050	1050	1050	1025
	3–1/2-Ton A/C Cooling	1225	0–1.0‡	1210	1210	1210	1225	1225	1225	1225	1225	1225	1225
	4-Ton A/C Cooling	1400	0–1.0‡	1385	1400	1400	1400	1400	1400	1400	1400	1395	1375
	5-Ton A/C Cooling	1750	0–1.0‡	1745	1730	1735	1735	1740	1735	1730	1725	1710	1685
	6-Ton A/C Cooling	2100	0–1.0	2100	2100	2080	2065	2060	2045	2030	2000	1960	1895
	Maximum	2100	0–1.0	2100	2100	2080	2065	2060	2045	2030	2000	1960	1895

*Actual external static pressure (ESP) can be determined by using the fan laws (CFM² proportional to ESP); such as, a system with 1750 CFM at 0.5 ESP would operate at high–heating airflow of 1470 CFM at 0.35 ESP, medium–heating airflow of 705 CFM at 0.08 ESP and low–heating airflow of 525 CFM at 0.05 ESP.

†All heating CFM's are when low/medium heat rise adjustment switch (SW1–3) and comfort/efficiency adjustment switch (SW1–4) are OFF.


‡Ductwork must be sized for high–heating CFM within the operational range of ESP.

**Wattage data provided is for the circulating blower with bottom return and does not include draft inducer, accessories, or gas controls.

†† Operation within the blank areas of the chart is not recommended because high–heat operation will be above 1.0 ESP.

***All airflows on 21–in. (533 mm) casing size furnaces are 5% less on side return only installations.

COMBUSTION-AIR PIPE FOR NON-DIRECT (1-PIPE) VENT APPLICATION (SIZES 040 THROUGH 120 ONLY)

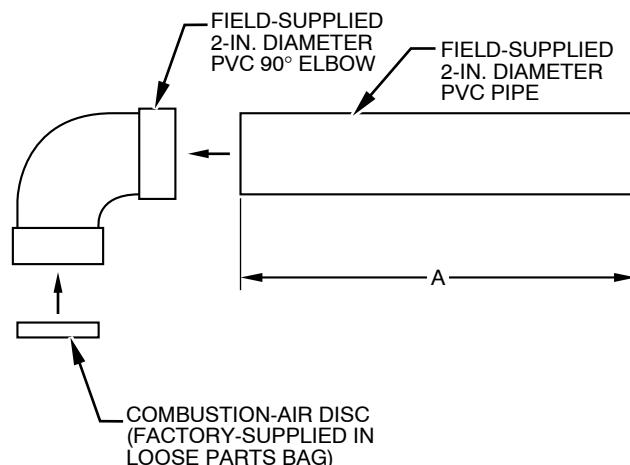


A96211

355AAV

Length of Straight Pipe Portion of Combustion Air Inlet Pipe Assembly – In. (mm)

CASING WIDTH	A
17 1/2 (445)	8 1/2 +/- 1/2 (216 +/- 13)
21 (533)	10 1/2 +/- 1/2 (267 +/- 13)
24 1/2 (622)	12 +/- 1/2 (305 +/- 13)

CONCENTRIC VENT - ALL MODEL SIZES (DIRECT VENT / 2-PIPE ONLY)

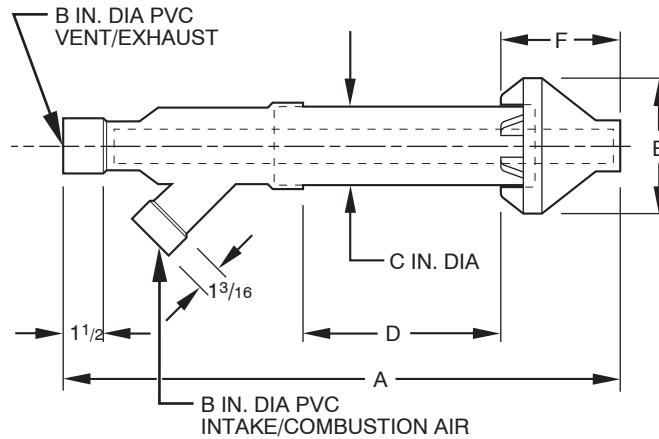

Dimensions - In. (mm)



KIT PART NO.	A*	B	C	D†	E	F
KGAVT0701CVT	33-3/8 (848)	2 (51)	3-1/2 (89)	16-5/8 (422)	6-1/4 (159)	5-3/4 (146)
KGAVT0801CVT	38-7/8 (987)	3 (78)	4-1/2 (114)	21-1/8 (537)	7-3/8 (189)	6-1/2 (165)

* Dimension A will change proportionally as dimension D is lengthened or shortened.

† Dimension D may be lengthened to 60 in. (1524 mm) maximum. Dimension D may also be shortened by cutting the pipes provided in the kit to 12 in. (304.8 mm) minimum.


A97110

CONDENSATE TRAP

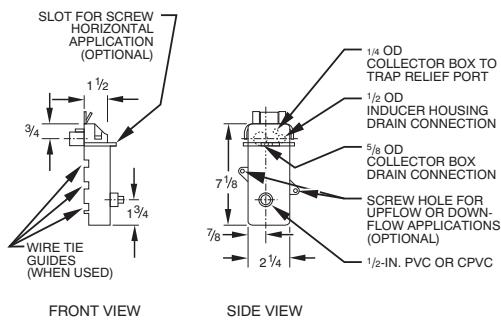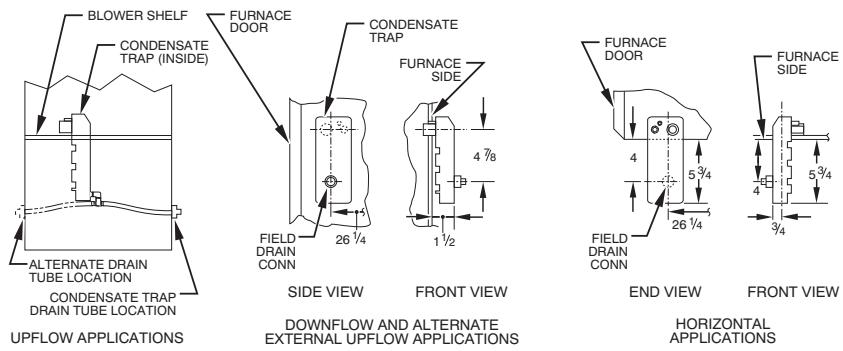

A08566

DIMENSIONAL DRAWING

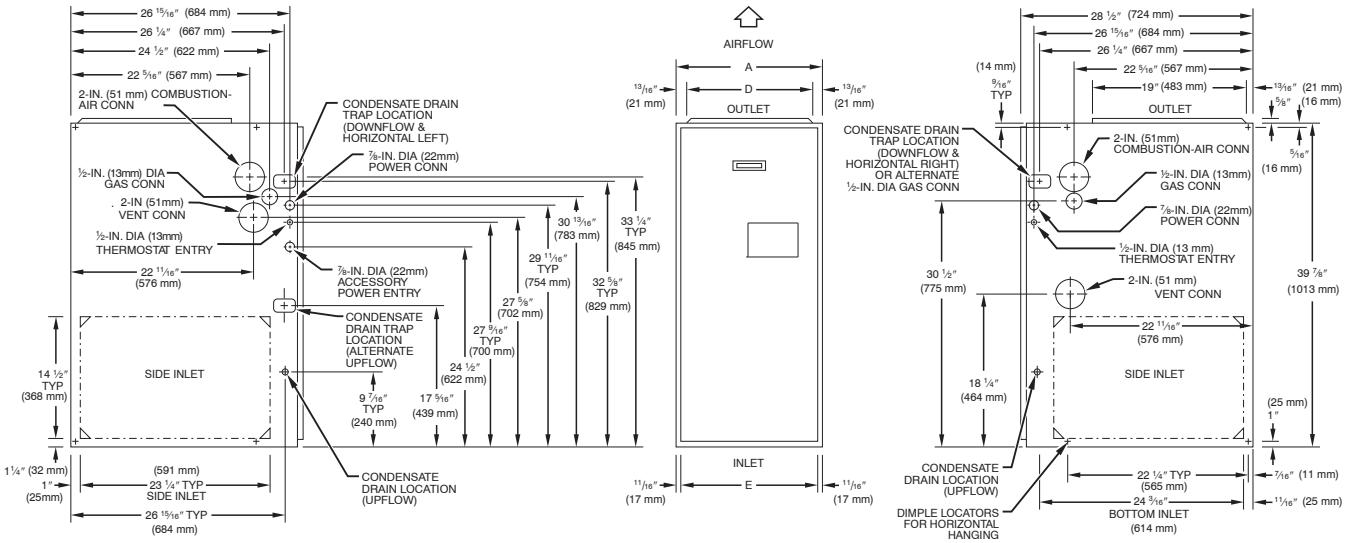

355AAV

- NOTES:**
1. Minimum return-air openings at furnace, based on metal duct. If flex duct is used, see flex duct manufacturer's recommendations for equivalent diameters.
 2. Minimum return-air opening at furnace:
 - a. For 800 CFM-16-in. (406mm) round or 14 1/2" (368 mm)x 12-in. (305 mm) rectangle
 - b. For 1200 CFM-20-in. (508mm) round or 14 1/2" (368mm)x 19 1/2-in. (495mm) rectangle
 - c. For 1600 CFM-22-in. (559mm) round or 14 1/2" (368mm)x 23 1/4-in.(591mm) rectangle
 - d. For airflow requirements above 1800 CFM, see Air Delivery table in Product Data literature for specific use of single side inlets. The use of both side inlets, a combination of 1 side and the bottom, or the bottom only will ensure adequate return air openings for airflow requirements above 1800 CFM.


A05124

DIMENSIONS - In. (mm)

UNIT SIZE	A	D	E
040-14 / 042040	24-1/2 (622)*	22-7/8 (581)*	23 (584)*
060-14 / 042060	17-1/2 (445)	15-7/8 (403)	16 (406)
080-14 / 042080	21 (533)	19-3/8 (492)	19-1/2 (495)
080-20 / 060080	21 (533)	19-3/8 (492)	19-1/2 (495)
100-20 / 060100	21 (533)	19-3/8 (492)	19-1/2 (495)
120-20 / 060120	24-1/2 (622)	22-7/8 (581)	23 (584)


*These dimensions reflect the wider casing for the Trophy (96.6% AFUE) furnace.

DOWNFLOW SUBBASE

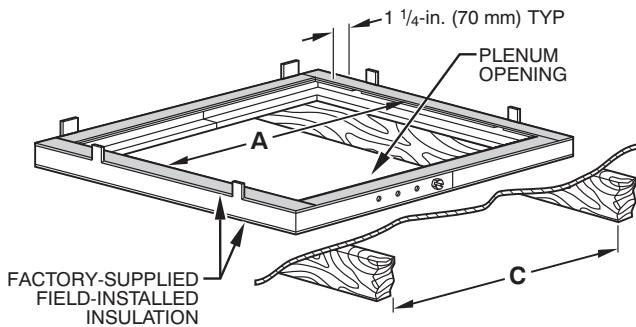

A97427

Assembled

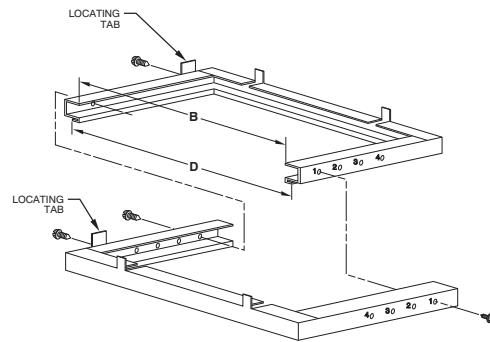


A88207

Disassembled

FURNACE CASING WIDTH	FURNACE IN DOWNFLOW APPLICATION	DIMENSIONS – In. (mm)				HOLE NO. FOR WIDTH ADJUSTMENT
		A	B	C	D	
17-1/2 (445)	Furnace with or without Cased Coil Assembly or Coil Box	15-1/8 (384)	19 (483)	16-3/4 (426)	20-3/8 (518)	3
21 (533)	Furnace with or without Cased Coil Assembly or Coil Box	18-5/8 (396)	19 (483)	20-1/4 (514)	20-3/8 (518)	2
24-1/2 (622)	Furnace with or without Cased Coil Assembly or Coil Box	22-1/8 (562)	19 (483)	23-3/4 (603)	20-3/8 (518)	1

*The plenum should be constructed 1/4-in. (6 mm) smaller in width and depth than the plenum dimensions shown above.

MEDIA FILTER CABINET

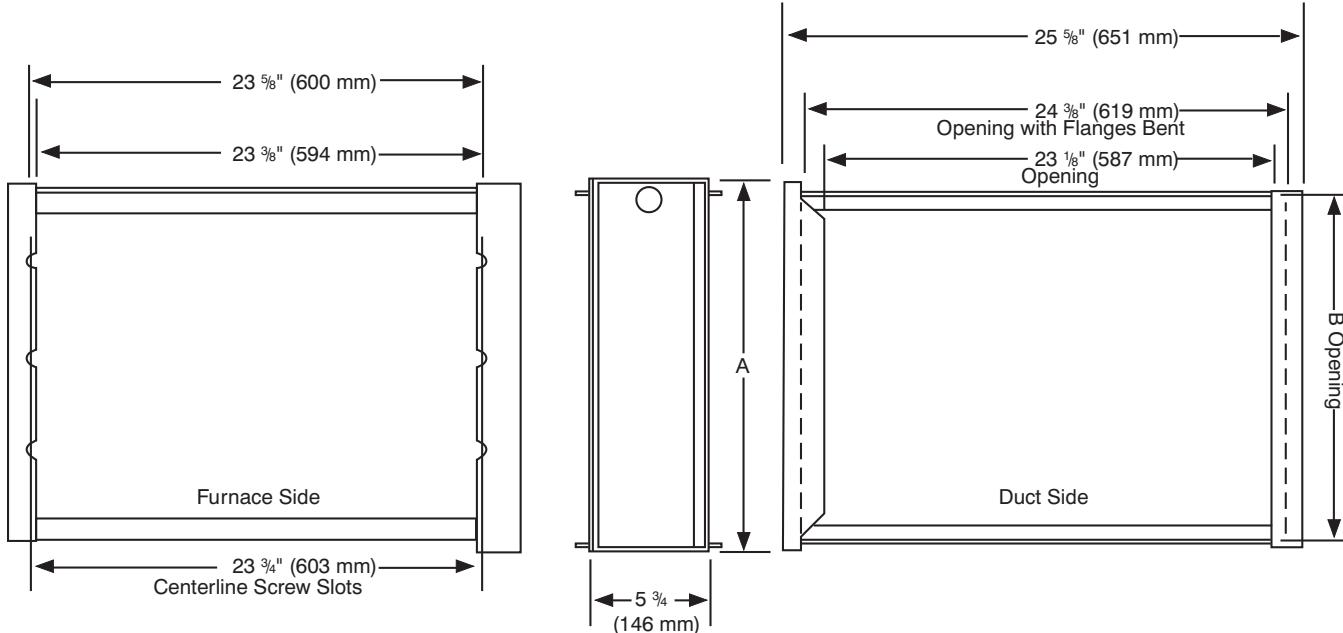

A05186A

DIMENSIONS – IN. (MM)			
MEDIA FILTER CABINET	A	B	SHIPPED WITH SIZES
16 (406)	17 (433)	16 (406)	040-08, 040-12, 060-08, 060-12, 080-12, 080-16
20 (508)	21 (533)	20 (508)	080-20, 100-16, 100-20
24 (610)	25 (635)	24 (610)	120-20, 140-20

ELECTRICAL DATA

UNIT SIZE	042040	042060	042080	060080	060100	060120
UNIT VOLTS - HERTZ - PHASE				115 - 60 - 1		
OPERATING VOLTAGE RANGE (Min - Max)*				104 - 127		
MAXIMUM UNIT AMPS	8.9	8.9	8.9	13.8	13.8	13.8
MINIMUM WIRE SIZE	14	14	14	12	12	12
MAXIMUM WIRE LENGTH (Ft / M)‡	31 (9.4)	31 (9.4)	31 (9.4)	32 (9.8)	32 (9.8)	32 (9.8)
MAXIMUM FUSE OR CKT BKR (Amps)**	15	15	15	20	20	20
TRANSFORMER (24v)			40va			
EXTERNAL CONTROL POWER AVAILABLE	Heating			25va		
	Cooling			34va		


*Permissible limits of the voltage range at which the unit will operate satisfactorily.

‡Length shown is as measured one way along wire path between unit and service panel for maximum 2% voltage drop.

**Time-delay type is recommended.

355AAV

TYPICAL WIRING SCHEMATIC

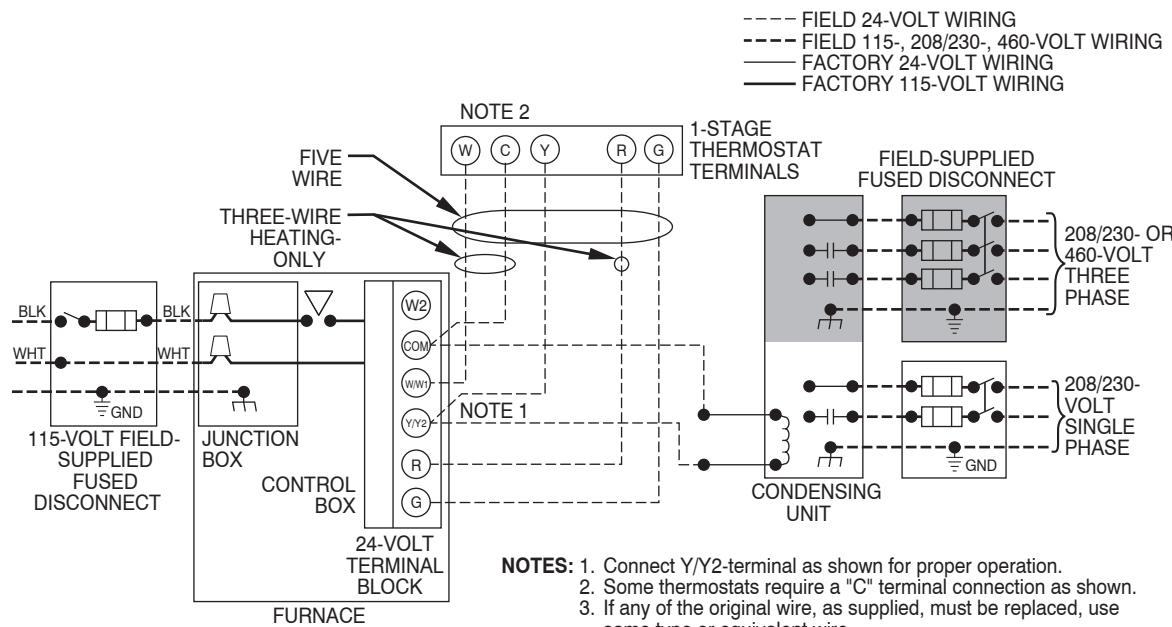

A95236

**COMBUSTION-AIR AND VENT PIPING FOR DIRECT VENT/2-PIPE (ALL SIZES) AND
NON-DIRECT VENT/1-PIPE (SIZES 040 THROUGH 120 ONLY) APPLICATIONS
MAXIMUM ALLOWABLE PIPE LENGTH - FT. (M)**

355AAV

VARIABLE SPEED VENT SIZING TABLE							
ALTITUDE	UNIT SIZE (BTUH)	Termination Type	Direct & Non-Direct Pipe Dia. (IN.)*	NUMBER OF 90° ELBOWS			
				1	2	3	4
0 – 2000 Ft. (0 – 610 M)	40,000	2 Pipe or 2-In. Concentric	1 – 1/2	50 (15.2)	45 (13.7)	40 (12.9)	35 (10.7)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	60,000	2 Pipe or 2-In. Concentric	1 – 1/2	50 (15.2)	45 (13.7)	40 (12.9)	35 (10.7)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	80,000	2 Pipe or 2-In. Concentric	1 – 1/2	30 (9.14)	25 (7.6)	20 (6.1)	15 (4.6)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	100,000	2 Pipe or 2-In. Concentric	2	45 (13.7)	40 (12.9)	35 (10.7)	30 (9.1)
			2 – 1/2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	120,000	2 Pipe or 3-In. Concentric	2 – 1/2	10 (3.0)	NA	NA	NA
			3	35 (10.7)	30 (9.1)	15 (4.8)	NA
			3†	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
2001 – 3000 Ft. (610 – 914 M)	ALTITUDE	UNIT SIZE (BTUH)	Termination Type	Direct & Non-Direct Pipe Dia. (IN.)*	NUMBER OF 90° ELBOWS		
					1	2	3
	40,000	2 Pipe or 2-In. Concentric	1 – 1/2	45 (13.7)	40 (12.9)	35 (10.7)	30 (9.14)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	60,000	2 Pipe or 2-In. Concentric	1 – 1/2	45 (13.7)	40 (12.9)	35 (10.7)	30 (9.14)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	80,000	2 Pipe or 2-In. Concentric	1 – 1/2	26 (7.9)	21 (6.4)	16 (4.9)	11 (3.4)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	100,000	2 Pipe or 2-In. Concentric	2	40 (12.2)	35 (10.7)	30 (9.1)	25 (7.6)
			2 – 1/2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	120,000	2 Pipe or 3-In. Concentric	3	31 (9.4)	26 (7.9)	12 (3.7)	NA
			3†	63 (19.2)	62 (18.9)	62 (18.9)	61 (18.6)
			6†	63 (19.2)	62 (18.9)	62 (18.9)	61 (18.6)
3001 – 4000 Ft. 914 – 1219 M	ALTITUDE	UNIT SIZE (BTUH)	Termination Type	Direct & Non-Direct Pipe Dia. (IN.)*	NUMBER OF 90° ELBOWS		
					1	2	3
	40,000	2 Pipe or 2-In. Concentric	1 – 1/2	42 (12.8)	37 (11.2)	32 (9.8)	27 (8.2)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	60,000	2 Pipe or 2-In. Concentric	1 – 1/2	42 (12.8)	37 (11.2)	32 (9.8)	27 (8.2)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	80,000	2 Pipe or 2-In. Concentric	1 – 1/2	25 (7.6)	20 (6.1)	15 (4.6)	10 (3.0)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	100,000	2 Pipe or 2-In. Concentric	2	38 (11.6)	33 (10.1)	28 (8.5)	23 (7.0)
			2 – 1/2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	120,000	2 Pipe or 3-In. Concentric	3	29 (8.8)	24 (7.3)	10 (3.0)	NA
			3†	59 (18.0)	59 (18.0)	58 (17.8)	57 (17.4)
			6†	59 (18.0)	59 (18.0)	58 (17.8)	57 (17.4)
4001 – 5000 Ft. (1219 – 1524 M)	ALTITUDE	UNIT SIZE (BTUH)	Termination Type	Direct & Non-Direct Pipe Dia. (IN.)*	NUMBER OF 90° ELBOWS		
					1	2	3
	40,000	2 Pipe or 2-In. Concentric	1 – 1/2	40 (12.2)	35 (10.7)	30 (9.1)	25 (7.6)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	60,000	2 Pipe or 2-In. Concentric	1 – 1/2	40 (12.2)	35 (10.7)	30 (9.1)	25 (7.6)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	80,000	2 Pipe or 2-In. Concentric	1 – 1/2	23 (7.0)	18 (5.5)	13 (4.0)	8 (2.4)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	100,000	2 Pipe or 2-In. Concentric	2	36 (11.0)	31 (9.4)	26 (7.9)	21 (6.4)
			2 – 1/2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	120,000	2 Pipe or 3-In. Concentric	3†	56 (17.1)	55 (16.8)	54 (16.5)	53 (15.8)
			6†	56 (17.1)	55 (16.8)	54 (16.5)	53 (15.8)
5001 – 6000 Ft. (1524 – 1829 M)	ALTITUDE	UNIT SIZE (BTUH)	Termination Type	Direct & Non-Direct Pipe Dia. (IN.)*	NUMBER OF 90° ELBOWS		
					1	2	3
	40,000	2 Pipe or 2-In. Concentric	1 – 1/2	37 (11.3)	32 (9.8)	27 (8.2)	22 (6.7)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	60,000	2 Pipe or 2-In. Concentric	1 – 1/2	37 (11.3)	32 (9.8)	27 (8.2)	22 (6.7)
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	80,000	2 Pipe or 2-In. Concentric	1 – 1/2	22 (6.7)	17 (5.2)	12 (3.7)	NA
			2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	100,000	2 Pipe or 2-In. Concentric	2	33 (10)	28 (8.5)	23 (7.0)	18 (5.5)
			2 – 1/2	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	120,000	2 Pipe or 3-In. Concentric	3†	53 (16.2)	52 (15.8)	50 (15.2)	49 (14.9)
			6†	53 (16.2)	52 (15.8)	50 (15.2)	48 (14.6)

*See notes on next page.

**COMBUSTION-AIR AND VENT PIPING FOR DIRECT VENT/2-PIPE (ALL SIZES) AND
NON-DIRECT VENT/1-PIPE (SIZES 040 THROUGH 120 ONLY) APPLICATIONS
MAXIMUM ALLOWABLE PIPE LENGTH - FT. (M)**

355AAV

ALTITUDE	UNIT SIZE (BTUH)	Termination Type	Direct & Non- Direct Pipe Dia. (IN.)*	Variable Speed Vent Sizing Table					
				NUMBER OF 90° ELBOWS					
						1	2	3	4
6001 – 7000 Ft‡ (1829 – 2134 M)	40,000	2 Pipe or 2-In. Concentric	1-1/2	35 (10.7)	30 (9.1)	25 (7.6)	20 (6.1)	15 (4.6)	10 (3.0)
			2	70 (21.3)	70 (21.3)	68 (20.7)	67 (20.4)	66 (20.1)	64 (19.5)
	60,000	2 Pipe or 2-In. Concentric	1-1/2	35 (10.7)	30 (9.1)	25 (7.6)	20 (6.1)	15 (4.6)	10 (3.0)
			2	70 (21.3)	70 (21.3)	68 (20.7)	67 (20.4)	66 (20.1)	64 (19.5)
	80,000	2 Pipe or 2-In. Concentric	1-1/2	20 (6.1)	15 (4.6)	10 (3.0)	5 (1.5)	NA	NA
			2	70 (21.3)	70 (21.3)	68 (20.7)	67 (20.4)	62 (18.9)	57 (17.4)
	100,000	2 Pipe or 2-In. Concentric	2	31 (9.4)	26 (7.9)	21 (6.4)	16 (4.9)	11 (3.4)	6 (1.8)
			2-1/2	70 (21.3)	70 (21.3)	68 (20.7)	67 (20.4)	66 (20.1)	64 (19.5)
	120,000	2 Pipe or 3-In. Concentric	3†	49 (14.9)	48 (14.6)	47 (14.3)	45 (13.7)	44 (13.4)	43 (13.1)
7001 – 8000 Ft‡ (2134 – 2438 M)	40,000	2 Pipe or 2-In. Concentric	1-1/2	32 (9.8)	27 (8.2)	22 (6.7)	17 (5.2)	12 (3.7)	7 (2.1)
			2	66 (20.1)	65 (19.8)	63 (19.2)	62 (18.9)	60 (18.3)	59 (18.0)
	60,000	2 Pipe or 2-In. Concentric	1-1/2	32 (9.8)	27 (8.2)	22 (6.7)	17 (5.2)	12 (3.7)	7 (2.1)
			2	66 (20.1)	65 (19.8)	63 (19.2)	62 (18.9)	60 (18.3)	59 (18.0)
	80,000	2 Pipe or 2-In. Concentric	1-1/2	18 (5.5)	13 (4.0)	8 (2.4)	NA	NA	NA
			2	66 (20.1)	65 (19.8)	63 (19.2)	62 (18.9)	57 (17.4)	52 (15.8)
	100,000	2 Pipe or 2-In. Concentric	2	29 (8.8)	24 (7.3)	19 (5.8)	14 (4.3)	9 (2.7)	NA
			2-1/2	66 (20.1)	65 (19.8)	63 (19.2)	62 (18.9)	60 (18.3)	59 (18)
	120,000	2 Pipe or 3-In. Concentric	3†	46 (14.0)	44 (13.4)	43 (13.1)	41 (12.5)	40 (12.2)	38 (11.6)
8001 – 9000 Ft‡ 2438 – 2743 M	40,000	2 Pipe or 2-In. Concentric	1-1/2	30 (9.1)	25 (7.6)	20 (6.1)	15 (4.6)	10 (3.0)	5 (1.5)
			2	62 (18.9)	60 (17.8)	58 (17.7)	56 (17.1)	55 (16.8)	53 (16.2)
	60,000	2 Pipe or 2-In. Concentric	1-1/2	30 (9.1)	25 (7.6)	20 (6.1)	15 (4.6)	10 (3.0)	5 (1.5)
			2	62 (18.9)	60 (17.8)	58 (17.7)	56 (17.1)	55 (16.8)	53 (16.2)
	80,000	2 Pipe or 2-In. Concentric	1-1/2	17 (5.2)	12 (3.1)	7 (2.1)	NA	NA	NA
			2	62 (18.9)	60 (18.3)	58 (17.7)	56 (17.1)	51 (15.5)	46 (14.0)
	100,000	2 Pipe or 2-In. Concentric	2	27 (8.2)	22 (6.7)	17 (5.2)	12 (3.7)	7 (2.1)	NA
			2-1/2	62 (18.9)	60 (18.3)	58 (17.7)	56 (17.1)	55 (16.8)	53 (16.2)
	120,000	2 Pipe or 3-In. Concentric	3†	43 (13.1)	41 (12.5)	39 (11.9)	37 (11.3)	35 (10.7)	34 (10.4)
9001 – 10000 Ft‡ (2743 – 3048 M)	40,000	2 Pipe or 2-In. Concentric	1-1/2	27 (8.2)	22 (6.7)	17 (5.2)	12 (3.7)	7 (2.1)	NA
			2	57 (17.4)	55 (16.8)	53 (16.2)	51 (15.5)	49 (14.9)	47 (14.3)
	60,000	2 Pipe or 2-In. Concentric	1-1/2	27 (8.2)	22 (6.7)	17 (5.2)	12 (3.7)	7 (2.1)	NA
			2	57 (17.4)	55 (16.8)	53 (16.2)	51 (15.5)	49 (14.9)	47 (14.3)
	80,000	2 Pipe or 2-In. Concentric	1-1/2	15 (4.6)	10 (3.0)	5 (1.5)	NA	NA	NA
			2	57 (17.4)	55 (16.8)	53 (16.2)	51 (15.5)	46 (14.0)	41 (12.5)
	100,000	2 Pipe or 2-In. Concentric	2	24 (7.3)	19 (5.8)	14 (4.3)	9 (2.7)	NA	NA
			2-1/2	57 (17.4)	55 (16.8)	53 (16.2)	51 (15.5)	49 (14.9)	47 (14.3)
	120,000	2 Pipe or 3-In. Concentric	3†	39 (11.9)	37 (11.3)	35 (10.7)	33 (10.1)	31 (9.5)	29 (8.8)

* Disk usage—Unless otherwise stated, use perforated disk assembly (factory-supplied in loose parts bag).

† Wide radius elbow.

‡ Vent sizing for Canadian installations over 4500 ft (1370m) above sea level are subject to acceptance by the local authorities having jurisdiction.

NA—Not Allowed; pressure switch will not make.

NOTES:

1. Do not use pipe size greater than those specified in table or incomplete combustion, flame disturbance, or flame sense lockout may occur.
2. Size both the combustion-air and vent pipe independently, determine the smallest diameter allowed by the table for each pipe, then use the larger diameter for both pipes.
3. Assume two 45° elbows equal one 90° elbow. Long radius elbows are desirable and may be required in some cases.
4. Elbows and pipe sections within the furnace casing and at the vent termination should not be included in vent length or elbow count.
5. The minimum pipe length is 5 ft (1.5 M) for all applications.

MAXIMUM ALLOWABLE EXPOSED VENT PIPE LENGTH (FT (M) WITH INSULATION IN WINTER DESIGN TEMPERATURE AMBIENT*

UNIT SIZE	WINTER DESIGN TEMPERATURE	MAXIMUM PIPE DIAMETER (IN.)	INSULATION THICKNESS†				
			0	3/8	1/2	3/4	1
042040	20°F (-6.7°C)	2	21 (6.4)	37 (11.3)	42 (12.8)	50 (15.2)	57 (17.4)
	0°F (-17.8°C)	2	10 (3.0)	22 (6.7)	25 (7.6)	30 (9.1)	35 (10.7)
	-20°F (-28.9°C)	2	5 (1.5)	14 (4.3)	17 (5.2)	21 (6.4)	25 (7.6)
042060	20°F (-6.7°C)	2	30 (9.1)	55 (16.8)	61 (18.6)	70 (21.3)	70 (21.3)
	0°F (-17.8°C)	2	16 (4.9)	33 (10.1)	38 (11.6)	46 (14.0)	53 (16.2)
	-20°F (-28.9°C)	2	9 (2.7)	23 (7.0)	26 (7.9)	33 (10.1)	38 (11.6)
042080 060080	20°F (-6.7°C)	2	37 (11.2)	65 (19.8)	70 (21.4)	70 (21.3)	70 (21.3)
	0°F (-17.8°C)	2	20 (6.1)	39 (11.9)	45 (13.7)	55 (16.8)	63 (19.2)
	-20°F (-28.9°C)	2	11 (3.4)	27 (8.3)	31 (9.4)	39 (11.9)	45 (13.7)
060100	20°F (-6.7°C)	2-1/2	41 (12.5)	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	0°F (-17.8°C)	2-1/2	21 (6.4)	42 (12.8)	48 (14.6)	59 (18.0)	68 (20.7)
	-20°F (-28.9°C)	2-1/2	11 (3.4)	28 (8.5)	33 (10.1)	41 (12.5)	49 (14.9)
060120	20°F (-6.7°C)	3	49 (14.9)	70 (21.3)	70 (21.3)	70 (21.3)	70 (21.3)
	0°F (-17.8°C)	3	26 (7.9)	51 (15.5)	58 (17.7)	70 (21.3)	70 (21.3)
	-20°F (-28.9°C)	3	15 (4.6)	35 (10.7)	40 (12.2)	50 (15.2)	59 (18.0)

* Pipe length (ft/m) specified for maximum pipe lengths located in unconditioned spaces. Pipes located in unconditioned space cannot exceed total allowable pipe length as specified in Table.

†Insulation thickness based on R value of 3.5 per in.


CLEARANCE TO COMBUSTIBLES

INSTALLATION

- This forced air furnace is equipped for use with natural gas at altitudes 0 - 10,000 ft (0 - 3,050m), except 140 size furnaces are only approved for altitudes 0 - 7,000 ft. (0 - 2,135m).
- An accessory kit, supplied by the manufacturer, shall be used to convert to propane gas use or may be required for some natural gas applications.
- This furnace is for indoor installation in a building constructed on site. This furnace may be installed in a manufactured (mobile) home when stated on rating plate and using factory authorized kit.
- This furnace may be installed on combustible flooring in alcove or closet at **Minimum Inches Clearance To Combustible Construction** as described below.
- This furnace requires a special venting system. Refer to the installation instructions for parts list and method of installation. In the US this furnace is for use with schedule-40 PVC, PVC-DWV, CPVC, or ABS-DWV pipe, and must not be vented in common with other gas-fired appliances. In Canada, refer to installation instructions for vent materials. Construction through which vent/air intake pipes may be installed is maximum 24 inches (610 mm), minimum 3/4 inches (19 mm) thickness (including roofing materials).
- Cette fournaise à air pulsé est équipée pour utilisation avec gaz naturel et altitudes comprises entre 0 - 3,050m (0 - 10,000 pi), excepté queles fournaises de 140 taille sont pour altitudes comprises entre 0 - 2,135m (0 - 7,000pi).
- Utilisez une trousse de conversion, fournie par le fabricant, pour passer au gaz propane ou pour certaines installations au gaz naturel.
- Cette fournaise à air pulsé est pour installation à l'intérieur dans un bâtiment construit sur place. Cette fournaise à air pulse peut être installée dans une maison préfabriquée (maison mobile) si prescrit par la plaque signalétique et s'il on utilise une trousse spécifiée par le fabricant.
- Cette fournaise peut être installée sur un plancher combustible dans un enfoncement ou un placard en observant les **Dégagement Minimum En Pouces Avec Éléments De Construction Combustibles**.
- Cette fournaise nécessite un système d'évacuation spécial. La méthode d'installation et la liste des pièces nécessaires figurent dans les instructions d'installation. Aux Etats-Unis, cette fournaise doit s'utiliser avec la tuyauterie des nomenclatures 40 PVC, PVC-DWV, CPVC, ou ABS-DWV et elle ne peut pas être ventilée conjointement avec d'autres appareils à gaz. Au Canada, referer aux instructions d'installation pour les matériaux à ventiler. Épaisseur de la construction au travers de laquelle il est possible de faire passer les tuyaux d'aération (admission/évacuation): 24 po (610 mm) maximum, 3/4 po (19mm) minimum (y compris la toiture).

For upflow and downflow applications, furnace must be installed level, or pitched within 1/2" (12.7mm) of level. For a horizontal application, the furnace must be pitched minimum 1/4" (6.35mm) to maximum of 1/2" (12.7mm) forward for proper drainage. See Installation Manual for **IMPORTANT** unit support details on horizontal applications.

Pour des applications de flux ascendant et descendant, la fournaise doit être installée de niveau ou inclinée à pas plus de 1/2" (12.7mm) du niveau. Pour une application horizontale, la fournaise doit être inclinée entre minimum 1/4" (6.35mm) et maximum 1/2" (12.7mm) du niveau pour le drainage approprié. En cas d'installation en position horizontale, consulter les renseignements **IMPORTANTS** sur le support dans le manuel d'installation.

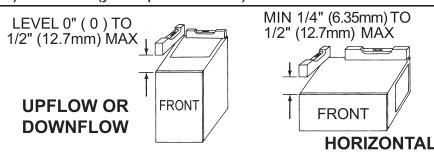

MINIMUM INCHES CLEARANCE TO COMBUSTIBLE CONSTRUCTION

ALL POSITIONS:

* Minimum front clearance for service 24 inches (610mm).

† † 140 size furnaces require 1 inch back clearance to combustible materials.

DOWNGLOW POSITIONS:

† For installation on combustible floors only when installed on special base No. KGASB0201ALL or NAHA01101SB, Coil Assembly, Part No. CAR, CAP, CNPV, CNRV or Coil Casing, Part No. KCAKC, or WENC or WTNC.

HORIZONTAL POSITIONS:

Line contact is permissible only between lines formed by intersections of top and two sides of furnace jacket, and building joists, studs, or framing.

§ Clearance shown is for air inlet and air outlet ends.

Ø 120 and 140 size furnaces require 1 inch bottom clearance to combustible materials.

DÉGAGEMENT MINIMUM EN POUCES AVEC ÉLÉMENTS DE CONSTRUCTION COMBUSTIBLES

POUR TOUTES LES POSITIONS:

* Dégagement avant minimum de 24 po (610mm) pour l'entretien.

† † Pour les fournaises de 140 taille, 1 po (25mm) dégagement des matériaux combustibles est requis au-arrière.

POUR LA POSITION COURANT DESCENDANT:

† Pour l'installation sur le plancher combustible seulement quand on utilise la base spéciale, pièce n° KGASB0201ALL ou NAHA01101SB, l'ensemble serpentin, pièce n° CAR, CAP, CNPV, CNRV, ou le carter de serpentin, pièce n° KCAKC ou WENC ou WTNC.

POUR LA POSITION HORIZONTALE:

Le contact n'est permis qu'entre les lignes formées par les intersections du dessus et des deux côtés de la chemise de la fournaise, et des solives, des montants ou de la charpente du bâtiment.

§ La distance indiquée concerne l'extrémité du tuyau d'arrivée d'air et l'extrémité du tuyau de sortie d'air.


Ø Pour les fournaises de 120 et 140 taille, 1 po (25mm) dégagement des matériaux combustibles est requis au-dessous.

This furnace is approved for UPFLOW, DOWNFLOW and HORIZONTAL installations.

Cette fournaise est approuvée pour l'installation HORIZONTALE et la circulation d'air VERS LE HAUT et VERS LE BAS.

Clearance arrows do not change with furnace orientation.

Les flèches de dégagement ne changent pas avec l'orientation de la génératrice d'air chaud.

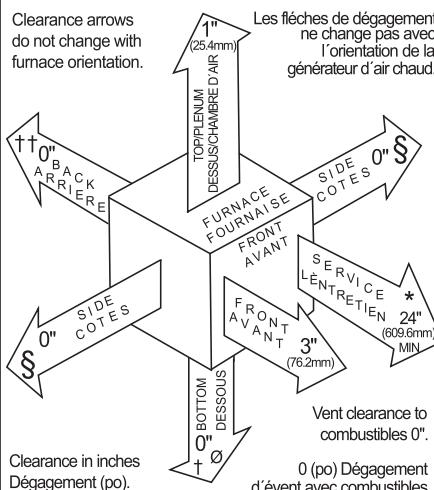


335122-201 REV. B LIT TOP

A08435

355AAV


TYPICAL INSTALLATIONS

355AAV

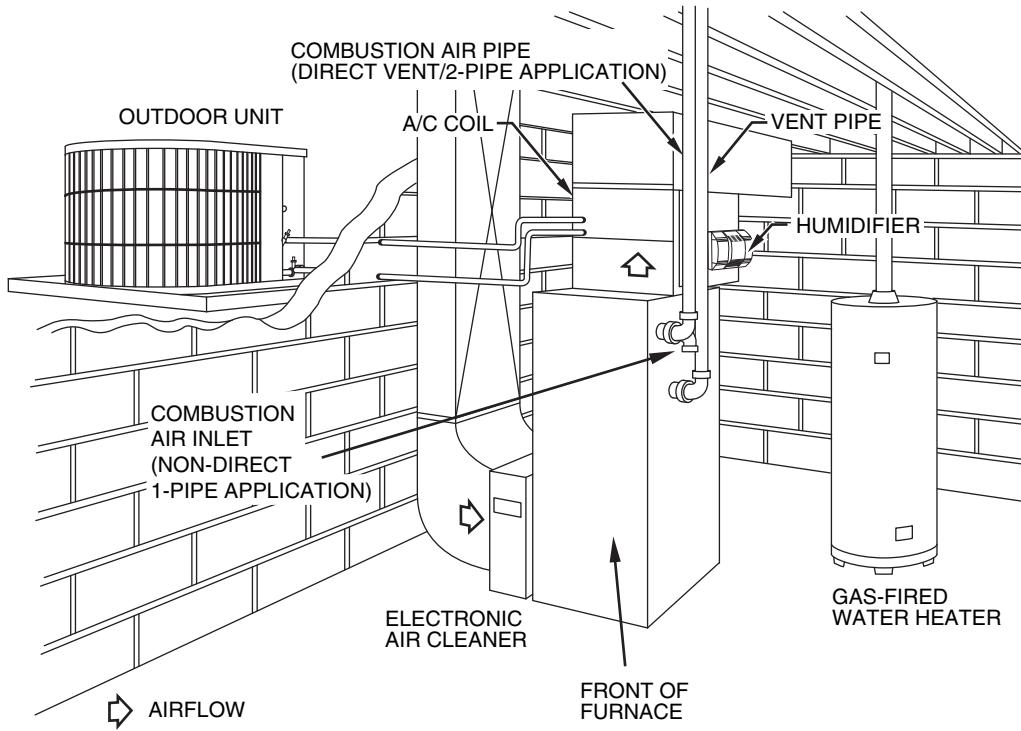

Upflow Application


A05064

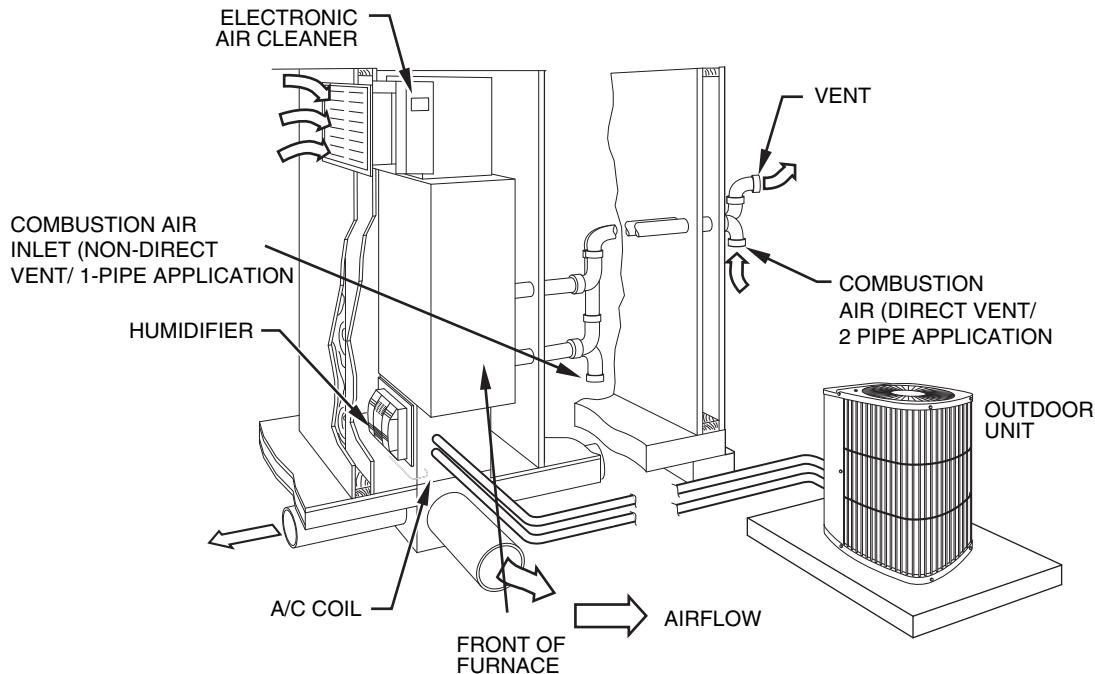

Downflow Application

A05065


TYPICAL INSTALLATIONS (CONTINUED)

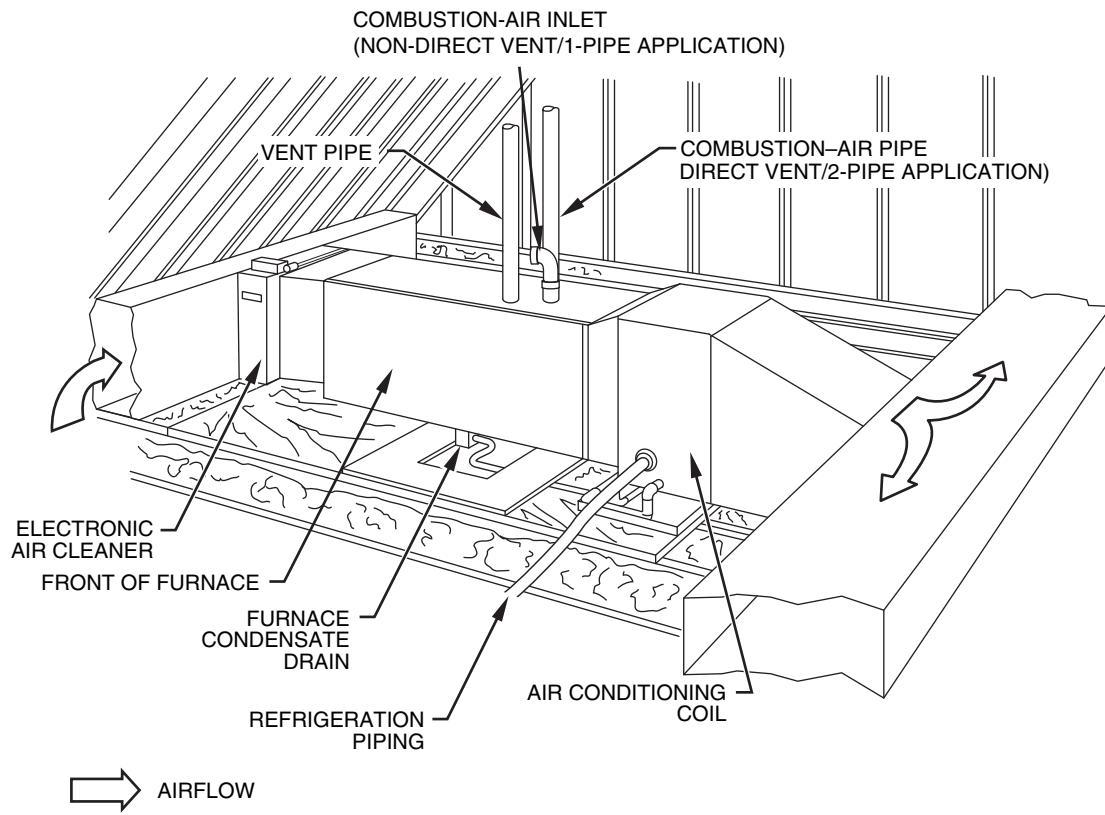

355AAV

Attic – Horizontal Application

A05066

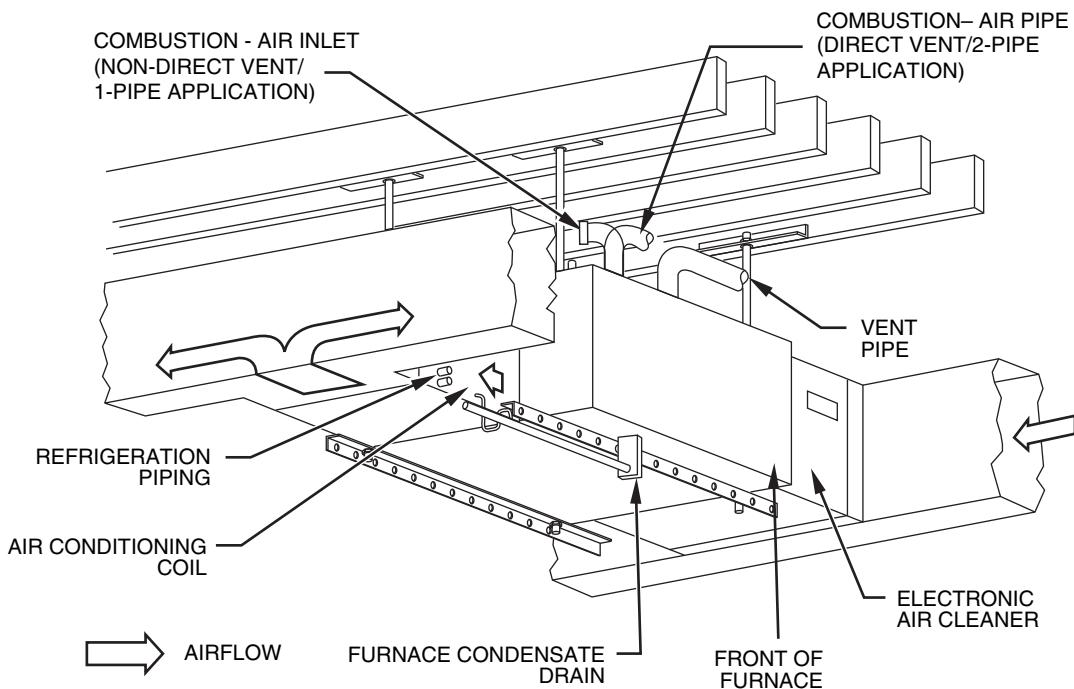

Crawlspace – Horizontal Application

A05067

ECM Inducer Motor

ECM Inducer motor shall be variable speed design, soft mounted to assembly to reduce vibration transmission.

Primary Heat Exchangers

Primary heat exchangers shall be 3-Pass 20 gauge corrosion-resistant aluminized steel of fold-and-crimp sectional design and applied operating under negative pressure.

Secondary Heat Exchangers

Secondary heat exchangers shall be of a flow-through design having a patented interior laminate coating of polypropylene for greater corrosion resistance with fold-and-crimp design and applied operating under negative pressure.

Controls

Controls shall include a micro-processor-based integrated electronic control board with at least 16 service troubleshooting codes displayed via diagnostic flashing LED light on the control, a self-test feature that checks all major functions of the furnace, and a replaceable automotive-type circuit protection fuse. Multiple operational settings available, including separate blower speeds for low heat, medium heat, high heat, low cooling, high cooling and continuous fan. Continuous fan speed may be adjusted from the thermostat. Cooling airflow will be selectable between 350 or 400 CFM per ton of air conditioning. Features will also include temporary reduced airflow in the cooling mode for improved dehumidification when an Evolution Control or Thermostat is selected as the thermostat.

Operating Characteristics

Heating capacity shall be _____ Btuh input; _____ Btuh output capacity.

Fuel Gas Efficiency shall be 92 to 96.6% AFUE.

Air delivery shall be _____ cfm minimum at 0.50 in. wc. external static pressure.

Dimensions shall be: depth _____ in.; width _____ in.; height _____ in. (casing only). Height shall be _____ in. with A/C coil and _____ in. overall with plenum.

Electrical Requirements

Electrical supply shall be 115 volts, 60 Hz, single-phase (nominal). Minimum wire size shall be _____ AWG; maximum fuse size of HACR-type designated circuit breaker shall be _____ amps.

Special Features

Refer to section of the product data identifying accessories and descriptions for specific features and available enhancements.

GUIDE SPECIFICATIONS**General****System Description**

Furnish a _____ 4-way multipole gas-fired condensing furnace for use with natural gas or propane (factory-authorized conversion kit required for propane); furnish cold air return plenum; furnish external media cabinet for use with accessory media filter or standard filter.

Quality Assurance

Unit will be designed, tested and constructed to the current ANSI Z 21.47/CSA 2.3 design standard for gas-fired central furnaces.

Unit will be third party certified by CSA to the current ANSI Z 21.47/CSA 2.3 design standard for gas-fired central furnaces. Unit will carry the CSA Blue Star® and Blue Flame® labels. Unit efficiency testing will be performed per the current DOE test procedure as listed in the Federal Register.

Unit will be certified for capacity and efficiency and listed in the latest GAMA Consumer's Directory of Certified Efficiency Ratings.

Unit will carry the current Federal Trade Commission Energy Guide efficiency label.

Delivery, Storage, and Handling

Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

Warranty (for inclusion by specifying engineer)

U.S. and Canada only. Warranty certificate available upon request.

Equipment**Blower Wheel and ECM Blower Motor**

Galvanized blower wheel shall be centrifugal type, statically and dynamically balanced. Blower motor of ECM type shall be permanently lubricated with sealed ball bearings, of _____ hp, and have infinitely variable speed from 250-1300 RPM operating only when 24-VAC motor inputs are provided. Blower motor shall be direct drive and soft mounted to the blower scroll to reduce vibration transmission.

Filters

Furnace shall have reusable-type filters. Filter shall be _____ in. (X) _____ in. An accessory highly efficient Media Filter is available as an option. _____ Media Filter.

Casing

Casing shall be of .030 in. thickness minimum, pre-painted galvanized steel.