

T2-PHP, T2-PAC
Legacy™ Series
Programmable Thermostat



Owner's Manual

Touch·N·Go™



YOU WILL LOVE THIS THERMOSTAT.

You have the Legacy™ Programmable thermostat. This unique device’s state-of-the-art technology makes it easier than ever for you to keep your home comfortable.

Designed to be as smart – and smart-looking – as any of the other electronics in your home, your new thermostat offers programming options to fit your lifestyle – not anybody else’s. Let this manual show you how easy it is to enjoy the newest experience in home comfort.



Designed and Assembled in the U.S.A.

TABLE OF CONTENTS

BUTTON IDENTIFICATION 4

ON-SCREEN INDICATORS 6

QUICK START

 Setting the time and day 8

 Setting the temperatures for heating and cooling 9

 Changing the temperature 11

 Understanding Touch ‘N’ Go™ feature 12

PROGRAMMING THE THERMOSTAT

 Programming the Touch ‘N’ Go feature 13

 Setting the home temperature 16

 Setting the away temperature 17

 Setting the sleep temperature 18

 Changing the temperature time periods 19

 Assigning time periods to temperatures 25

OPERATING THE THERMOSTAT

 Using Touch ‘N’ Go buttons 29

 To make a temporary change 29

 To hold it at home, away or sleep 30

 Using the thermostat to turn the heating and cooling system off 31

 Using the fan 32

 Using emergency heat (heat pump systems only) 33

 Changing the batteries 34

ADVANCED PROGRAMMING OPTIONS

 Advanced programming display codes chart 37

 Changing from Fahrenheit to Celsius 38

TABLE OF CONTENTS

Turning off the continuous backlighting 39

Keypad lockout 41

Unlocking the keypad 42

Changing from programmable to nonprogrammable 43

Changing the number of programming periods 45

SPECIAL FEATURES

Auto changeover 46

Smart Recovery 46

WHAT IF . . .

The battery icon is displayed 47

“Aux heat on” is displayed (heat pump systems only) 47

“Em heat” is displayed (heat pump systems only) 47

There is a power outage 48

You get a system error message 48

COMMON TERMS AND WHERE TO FIND THEM

Auto changeover 49

Auxiliary heat (heat pump systems only) 49

Backlighting 49

Emergency heat (heat pump systems only) 50

Hold 50

Mode 50

Override 50

Smart Recovery 50


Temporary hold 51

Time period 51

Touch ‘N’ Go TM 51

WARRANTY 53


BUTTON IDENTIFICATION

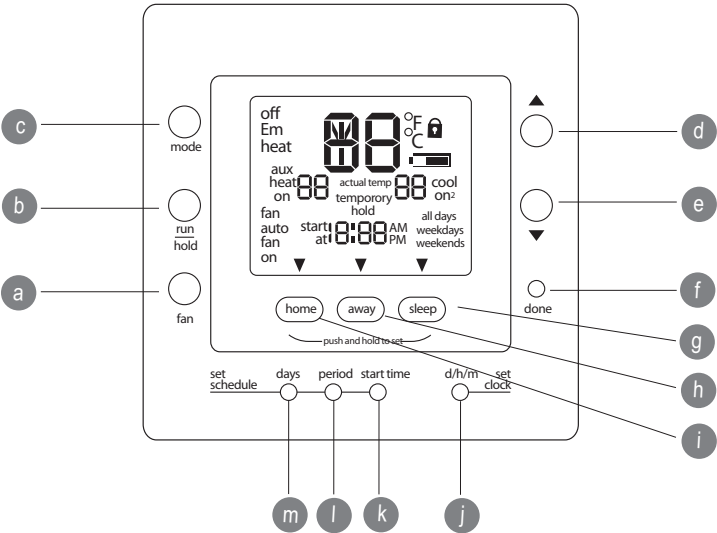

BUTTON IDENTIFICATION

- | | |
|---------------------------|---|
| a. FAN | Selects whether the fan operates continuously (on) or only when needed for heating or cooling (auto) |
| b. RUN/HOLD | Holds the currently selected temperature or runs the scheduled program |
| c. MODE | Selects whether thermostat is set for heating, cooling, emergency heat (heatpump system only), auto (heat and cool as needed), or off |
| d. UP | Increases the temperature or adjusts the screen selection up when setting advanced programming features |
| e. DOWN | Decreases the temperature or adjusts the screen selection down when setting advanced programming features |
| f. DONE | Saves settings when completing a set-up or programming step |
| g. SLEEP | Activates heating and cooling settings for the sleep program period |
| h. AWAY | Activates heating and cooling settings for the away program period |
| i. HOME | Activates heating and cooling settings for the home program period |
| j. D/H/M SET CLOCK | Activates clock set mode |
| k. START TIME | Activates the programming menu, displaying the four period start times |
| l. PERIOD | Activates the programming menu, displaying the four programming time periods |
| m. DAYS | Activates the programming menu, displaying three options – all days, weekdays and weekends |

ON-SCREEN INDICATORS

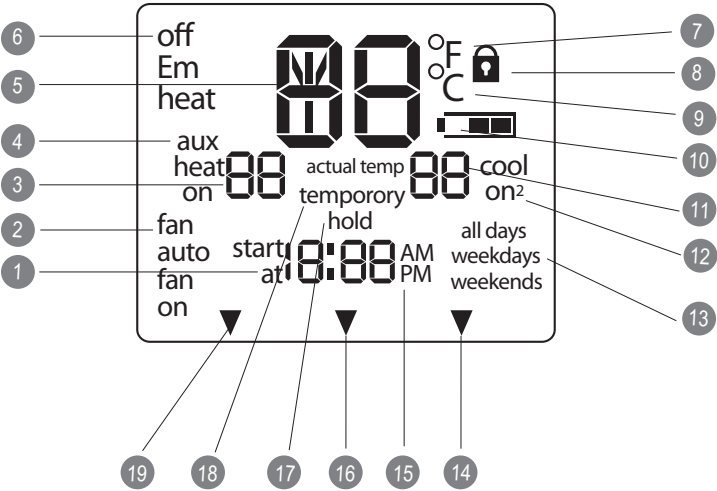

ON-SCREEN INDICATORS



1. Clock
2. Fan mode – on or auto
3. Selected heating set point; “on” indicates system is in heating mode
4. System is in auxiliary (supplemental) mode
5. Current temperature
6. Thermostat mode is either off or using emergency heat
7. Fahrenheit
8. Keypad is locked (no padlock means unlocked)
9. Celsius
10. Battery strength indicator
11. Selected cooling set point; “on” indicates system is in cooling mode
12. Second stage of cooling is active for 2 speed thermostat models
13. Day of the week for programming mode
14. System is using sleep settings
15. AM or PM indicator for current time
16. System is using away settings
17. System is in hold
18. System is in temporary hold
19. System is using home settings

QUICK START

Setting the time and day

You must set the time and day before you can use any of the thermostat's programming features.

1. Open the door.
2. Press the **d/h/m** button. It's on the lower right, under the display screen. The day of the week will flash on the display.
3. Press the **up** or **down** button, located to the right of the display, to change the day. Stop on the correct day.
4. Press the **d/h/m** button again and the hour will flash on the display.
5. Press the **up** or **down** button to change the hour. Stop on the correct number.
6. Press the **d/h/m** button again and minutes will flash on the display.
7. Press the **up** or **down** button to change the minutes. Stop on the correct minute.
8. Press the **done** button or close the door.




QUICK START

Setting the temperatures for heating and cooling





Your thermostat is installed with pre-set heating and cooling temperature settings. You can use these or change them so your home is as warm or as cool as you'd like it to be. These steps will hold the temperature where you set it. For the temperature to change automatically according to your lifestyle needs – whether you're home, away or asleep – you'll need to follow the Touch 'N' Go instructions on pages 13 – 19.

- 1. Open the door.
- 2. Press the **up** or **down** button located on the right side of the display. You will see the preset temperature settings for heating and cooling. The word *heat* will flash.
- 3. Press the **up** or **down** button to change the *heat* setting. Stop on the correct setting.
- 4. Press the **hold/run** button.



QUICK START

- 5. Press the **mode** button located on the left side of the display once. You will see the preset temperature setting for cooling appear on the right side of the display.
- 6. Press the **up** or **down** button. The word *cool* will flash.
- 7. Continue pressing the **up** or **down** button to change the *cool* setting. Stop at the desired cooling setting.
- 8. Press the **hold/run** button located on the left side of the display. This holds the thermostat at that setting.
- 9. Press the **done** button.
- 10. Close the door.






QUICK START

Changing the temperature

There are times when you want to change the temperature.

Here's how.

1. Open the door.
2. Press the **up** or **down** buttons on the right side until you reach the desired temperature setting. This creates a “temporary hold” until the next pre-set time period. You will see *temporary hold* on the display. (To switch from the cooling temperature to the heating temperature – or vice versa – press the **mode** button on the left until the word heat or *cool* is flashing.)
3. To maintain that temperature setting so it doesn't change during the next pre-set time period, press the **hold/run** button on the left side. The display will show *hold*. The temperature will stay at the setting you selected until you release the hold.
4. To return the temperature to the pre-set level for that time period, press **hold/run**. This releases the hold and the temperature will return to its programmed level.
5. Close the door.



QUICK START

Understanding Touch ‘N’ Go feature

The unique Touch ‘N’ Go feature on your thermostat is a revolutionary tool that lets you use a simpler programming option – literally, touch and go – to help you get the maximum comfort control from the entire comfort system.

With the touch of one **Touch ‘N’ Go** button – **home, away** or **sleep** – you can tell your thermostat where you’ll be. To keep the home at that comfort level indefinitely, you add one more button – **hold/run** – and you’re set. It’s the ideal choice for somebody whose schedule varies from day to day or doesn’t fit into the two or four predictable time periods allowed by the thermostat.

At the same time, these three comfort options – home, away and sleep – are connected to the thermostat’s full-level programming power so that you get the home comfort you desire exactly when you want it.

The three **Touch ‘N’ Go** buttons are preset at the factory for typical heating and cooling temperature settings and assigned to specific time periods. You can change these temperature settings and the hours you want to use them easily. Learn how to do that and discover how useful this device is as you read through this manual.

PROGRAMMING THE THERMOSTAT

Programming the Touch ‘N’ Go feature

The Touch ‘N’ Go feature on your thermostat involves the **home**, **away** and **sleep** buttons immediately under the display. They are used for two programming options. One is more sophisticated than the other.

The simpler programming option requires you to either accept the preset temperature settings for when you are home, away or asleep, or to set your own Touch ‘N’ Go heating and cooling temperature settings. Either way, your home, away and sleep settings are automatically linked to one of four time periods that are also preset (and changeable) on the thermostat.

You can override those preset time periods and their relationship to your **home**, **away** and **sleep** buttons by pressing one of those three buttons at any time. This will let you create a “temporary hold” at that comfort level until the next programming period.

You can also hold the thermostat at your home, away or sleep temperatures by pressing one of those three buttons and then pressing the hold button.

This approach is popular with people who don’t follow the same routine every day. And while you need to remember to push one of those three buttons when you leave, come home, or go to bed, doing that is easier for some than manually re-setting the temperature several times a day.

PROGRAMMING THE THERMOSTAT

The more sophisticated programming option works well with people who tend to follow a more predictable routine and who also want to get the most from this thermostat’s potential. For both programming options, you must set-up your Touch ‘N’ Go heating and cooling temperatures in order to use the thermostat’s expanded programming options.

Here are the temperature settings that are pre-programmed for your home, away and sleep periods.

Touch ‘N’ Go Option	Heat	Cool
Home	68	74
Away	60	85
Sleep	66	78

PROGRAMMING THE THERMOSTAT




Use this blank grid to determine how warm or cool you want your home to be when you’re home, away or asleep. You’ll assign time periods to those temperatures later.

Touch ‘N’ Go Option	Heat	Cool
Home		
Away		
Sleep		

PROGRAMMING THE THERMOSTAT

Setting the home temperature




1. Open the door.
2. Press the **home** button located under the display on the left. You will see a triangle icon (▼) above the **home** button. This icon will always tell you whether you're in the home, away or sleep setting.
3. You will see the heating and cooling temperatures that were set at the factory. To use these, just close the door.
4. To change the factory settings press the **home** button. You will see the word heat flashing on the screen.
5. Press the **up** or **down** button until you reach the desired temperature setting.
6. Press and hold the **home** button for about three seconds. The set temperature will flash, indicating that it saved your settings.
7. To change the cooling temperature setting, press the **mode** button repeatedly until you see the word cool flashing on the screen.
8. Press the **up** or **down** button on the right side of the display until you reach the desired temperature setting.
9. Press and hold the **home** button for about three seconds. The set temperature will flash, indicating that it saved your settings.



PROGRAMMING THE THERMOSTAT

Setting the away temperature




1. Press the **away** button located under the display in the center. You will see a triangle icon (▼) above the **away** button.
2. You will see the heating and cooling temperatures that were set at the factory. To use these, just close the door.
3. To change the factory settings, press the **away** button. You will see the word **heat** flashing on the screen.
4. Press the **up** or **down** button on the right side of the display until you reach the correct temperature setting.
5. Press and hold the **away** button for about three seconds. The set temperature will flash, indicating that it saved your settings.
6. To change the cooling temperature setting, press the **mode** button until you will see the word **cool** flashing on the screen.
7. Press the **up** or **down** button until you reach the desired temperature setting.
8. Press and hold the **away** button for about three seconds. The set temperature will flash, indicating that it saved your settings.



PROGRAMMING THE THERMOSTAT


Setting the sleep temperature

1. Press the **sleep** button located under the display in the center. You will see a triangle icon (▼) above the **sleep** button.
2. You will see the heating and cooling temperatures that were set at the factory. To use these, just close the door.
3. To change the factory settings, press the **sleep** button. You will see the word **heat** flashing on the screen.
4. Press the **up** or **down** button on the right side of the display until you reach the desired temperature setting.
5. Press and hold the **sleep** button for about three seconds. The set temperature will flash, indicating that it saved your settings.
6. To change the cooling temperature setting, press the **mode** button until you see the word **cool** flashing on the screen.



PROGRAMMING THE THERMOSTAT

- 7. Press the **up** or **down** button until you reach the desired temperature setting.
- 8. Press and hold the **sleep** button for about three seconds. The set temperature will flash, indicating that it saved your settings.
- 9. Close the door.



Changing the temperature time periods

After you have set your three **Touch ‘N’ Go** buttons with temperature settings for when you’re away, home and asleep, you can program the time of day you want to use for those temperature settings.

The thermostat has four time ranges called periods. They are identified on the display as P1, P2, P3 and P4.

With four time period options, you have a great deal of schedule and temperature flexibility. For example, in a household where nobody is home during the day, the users might use P1 for the morning before they leave for work, P2 for the hours they are at work, P3 for the period when they are home in the evening, and P4 when they are sleeping.

In situations where somebody is home most of the day, P1, P2 and P3 can all be assigned the same “home” temperatures, while P4 is reserved for the sleeping hours. (To learn how to reduce the number of time periods from four to two, see page 22.)

PROGRAMMING THE THERMOSTAT

The thermostat has preset periods (see below), but you can change these to fit your lifestyle.

Period	Preset Hours
P1	6:00 AM to 8:00 AM
P2	8:00 AM to 5:00 PM
P3	5:00 PM to 10:00 PM
P4	10:00 PM to 6:00 AM





What time blocks work for you? Write them in here and refer to this as you make the changes on the thermostat.

Period	Your Hours
P1	
P2	
P3	
P4	

PROGRAMMING THE THERMOSTAT

Here’s how to change the factory-set time periods.

1. Open the door.
2. Press the **days** button at the bottom of the thermostat. You will see *all days*, *weekdays* and *weekends* flashing on the display. You will be changing the time periods according to the days of the week. *All days* is used when the household’s weekday and weekend schedules are the same.
3. You must select one of these three timeframe options – *all days*, *weekdays* or *weekends* – by pressing the **up** or **down** button located to the right of the display. You may also make your selection by pressing the **days** button again. (Select *all days* if your weekday and weekend schedules are the same.)
4. When you have selected one of the three options (*all days*, *weekdays*, *weekends*), press the **period** button at the bottom of the thermostat. You will see *P* and a flashing *1* on the screen. This is period 1 (P1), which begins at **6:00 AM**.
5. To change the hours in *P1*, press the **start time** button at the bottom of the screen.




PROGRAMMING THE THERMOSTAT

- 6. You will see the hours in **6:00 AM** flashing on the screen. Press the **up** or **down** button and stop on the desired time.
- 7. To change the minutes, press the **start time** button on the bottom of the screen again. You will see the minutes in **6:00 AM** flashing on the screen. Press the **up** or **down** button and stop on the desired time.

The “stop time” for period 1 (P1) is also the “start time” for period 2 (P2). To change the stop time for P1 – which means you are also changing the start time for P2 – use the instructions in the next step to change the start time for period 2.

- 8. To change the start time for *period 2* (P2), press the **period** button at the bottom of the screen twice. This displays the information for period 2, with **P2** flashing on the display.
- 9. You will see the hours in **8:00 AM** flashing on the screen. Press the **up** or **down** button and stop on the desired time.



PROGRAMMING THE THERMOSTAT

10. To change the minutes, press the start time button on the bottom of the screen again. You will see the minutes in **8:00 AM** flashing on the screen. Press the **up** or **down** button and stop on the desired time.
11. To change the start time for period 3 (P3), press the **period** button at the bottom of the screen three times. This displays the information for period 3, with **P3** flashing on the display.
12. You will see the hours in **5:00 PM** flashing on the screen. Press the **up** or **down** button and stop on the desired time.
13. To change the minutes, press the **start time** button on the bottom of the screen again. You will see the minutes in **5:00 PM** flashing on the screen. Press the **up** or **down** button and stop on the desired time.
14. To change the start time for period 4 (P4), press the **period** button at the bottom of the screen repeatedly. This displays the information for period 4, with **P4** flashing on the display.
15. You will see the hours in **10:00 PM** flashing on the screen. Press the **up** or **down** button and stop on the desired time.
16. To change the minutes, press the **start time** button on the bottom of the screen again. You will see the minutes in **10:00 PM** flashing on the screen. Press the **up** or **down** button and stop on the desired time.

PROGRAMMING THE THERMOSTAT

17. If you did not select *all days* when you started this process, repeat all the steps for your remaining timeframe choice – *weekdays* or *weekends*.
18. To confirm that the thermostat has accepted your changes, cycle through the four time periods by pressing **days**, selecting your time frame – *all days*, *weekdays*, or *weekends* – and then pressing the **period** button to see the hours assigned for each start time. Each time you press **period**, you will advance to the next start time.
19. Close the door.

PROGRAMMING THE THERMOSTAT

Assigning time periods to temperatures

To get the most from your thermostat’s programming features, you will want to take the remaining steps that will link your four schedule time periods (P1, P2, P3 and P4) to the heating and cooling temperatures you set with the Touch ‘N’ Go buttons – **home**, **away** and **sleep**.

Taking these final steps will be easier if you complete the grid below before programming the thermostat. It will help you decide how you want to assign the comfort temperatures you’ve selected for home, away and sleep to the time periods you’ve established. The completed grid will help you keep track of your information as you work with the thermostat.

Here’s an example of how this would look using the factory-set periods and Touch ‘N’ Go options.

Pre–set Period Start Time	Period Number	Pre–set Touch ‘N’ Go Option for Each Period
6:00 AM	1	Home
8:00 AM	2	Away
5:00 PM	3	Home
10:00 PM	4	Sleep


PROGRAMMING THE THERMOSTAT

Complete this schedule according to daily routine and use it as you follow the instructions below.

Your Period Start Time	Period Number	Your Touch 'N' Go Option for Each Period
	1	
	2	
	3	
	4	


Here's how to connect your four time periods with the three comfort ranges – home, away and sleep.

- 1. Open the door.
- 2. Press the **days** button at the bottom of the thermostat. You will see *all days*, *weekdays* and *weekends* flashing on the display.




PROGRAMMING THE THERMOSTAT


3. Select one of these three options by pressing the **up** or **down** button located to the right of the display. You may also make your selection by pressing the **days** button again. Select *all days* if your weekday schedule is the same as your weekend schedule.



4. When you have selected one of the three options (*all days*, *weekdays*, *weekends*), press the **period** button at the bottom of the thermostat. **P1** will flash on the display.



5. Press the Touch ‘N’ Go button – **home**, **away** or **sleep** – you want to use during period 1 (P1) from the row of buttons just below the display. You will see the triangle icon (▼) above the button selected. This tells the thermostat whether you are home, away, or asleep during P1. The thermostat will use the heating and cooling temperature settings you’ve selected for that Touch ‘N’ Go button. For example, if your heating temperature setting for **home** is 72 degrees, the thermostat will keep the heat at 72 during P1.



6. Press the **period** button twice. **P2** will flash on the display.

PROGRAMMING THE THERMOSTAT

7. Press **home, away** or **sleep**.
8. Press the **period** button twice. **P3** will flash on the display.
9. Press **home, away** or **sleep**.
10. Press the **period** button twice. **P4** will flash on the display.
11. Press **home, away** or **sleep**.
12. If you did not select *all days* when you started this process, then repeat all the steps for your remaining timeframe choice – *weekdays* or *weekends*.
13. To confirm that the thermostat has accepted your changes, cycle through the four time periods by pressing **days**, selecting your time frame – *all days*, *weekdays*, or *weekends* – and then pressing the **period** button to see the Touch 'N' Go option assigned for each start time. Each time you press **period**, you will advance to the next start time.
14. Press **done** or close the door.


OPERATING THE THERMOSTAT

Using Touch ‘N’ Go buttons

Once you have set the temperatures and time periods that correspond with your three Touch ‘N’ Go comfort buttons (see **Programming the Touch ‘N’ Go feature**, page 13, and **Assigning time periods to temperatures**, page 26), you won’t need to use your Touch ‘N’ Go buttons unless you want to make a temporary change. For example, if you go to bed earlier than usual, pressing the **sleep** button will lower the temperature sooner than scheduled. If you go to bed later than usual, pressing the **home** button will keep the home warmer past your usual bedtime but you’ll need to press **sleep** before you go to bed.

To make a temporary change

1. Open the door.
2. Press the **home**, **away** or **sleep** button that you want. You will see the words *temporary hold* on the display and the triangle icon (▼) over the button you’ve selected. The system will change to the temperature setting programmed for that lifestyle period. It will maintain that temperature setting until the start of the next programmed cycle.




OPERATING THE THERMOSTAT

- 3. To return to the originally programmed lifestyle period, press the appropriate **home**, **away** or **sleep** button. The system will return to that time period and the words *temporary hold* will disappear.
- 4. Close the door.

To hold it at home, away or sleep


There might be situations when you want to override the programming and hold the home’s temperature at one of the three home, away or sleep comfort levels. This is useful when you’re going on vacation or traveling, or when you’re home unexpectedly. Here’s how to prevent the thermostat from changing temperatures when it reaches the next programming time period.

- 1. Open the door.
- 2. Press the desired button under the display – **home**, **away** or **sleep**.
- 3. Press the **hold/run** button on the left side. You will see the word *hold* on the display.



OPERATING THE THERMOSTAT


- 4. To return to your original programming schedule, press the **hold/run** button. The word *hold* will disappear.
- 5. Close the door.



Using the thermostat to turn the heating and cooling system off

Here’s how to use the thermostat to turn the heating and cooling system off.

- 1. Open the door.
- 2. Press the **mode** button on the top left repeatedly until the display shows *off* in the upper left.
- 3. Close the door.




OPERATING THE THERMOSTAT

Using the fan

The fan function helps distribute warmth or cooling throughout your home for a more even temperature in all spaces. The thermostat is automatically set so that the fan runs only during your heating and cooling cycles (auto mode). However, you can adjust the settings so that the fan runs continuously, even between cycles or when the system is turned off.

1. Open the door.
2. Press the **fan** button on the left side. You will see *fan on* in the lower left corner of the display.
3. To return the fan to auto mode, press the **fan** button again. You will see *fan auto* on the display.
4. Close the door.



OPERATING THE THERMOSTAT


Using emergency heat (heat pump systems only)

Emergency heat is useful when the automatic auxiliary heat system can't keep up with demand. (Systems with heat pumps use "auxiliary heat" when it's too cold outside for the heat pump to heat the house without help. The display indicator for this is *aux heat on*.)

If the heat pump compressor that works with auxiliary heat fails, or if the heat pump isn't working at all, you can turn on the emergency heat for that extra help. (You'll know there's a problem if the house can't seem to get warm when it's very cold outside.) You want to avoid using emergency heat, though, because it's the most expensive option. And, of course, if you suspect a problem with your heat pump, call your heating and cooling dealer immediately.

Here's how to set your thermostat to use emergency heat.

- 1. Open the door.
- 2. Press the **mode** button three times. You will see *Em heat* in the upper left of the display.
- 3. Close the door.



OPERATING THE THERMOSTAT

Changing the batteries


Your thermostat is probably powered by the HVAC equipment, but if it isn't, it's battery powered. You can tell if it's battery powered by checking in Advanced Programming Options. (See page 37.) If there's no lighting until you touch a button, it's battery powered. When the thermostat uses electricity, the batteries (if installed) take over if the electricity goes out. This allows you to monitor the indoor temperature when there's no electricity.

When powered by batteries, your thermostat's two AA batteries should last about one year. When your batteries have lost about one-third of their power, a battery icon shows up on the display in the upper right corner. Two-thirds of it will be black. As the batteries get weaker, the icon goes down to one bar and then none. When the battery icon is less than full, you will first see the loss of backlight function. When the batteries are completely dead, you won't be able to use the thermostat.

OPERATING THE THERMOSTAT

We recommend that you replace the batteries at the one bar level with two AA alkaline batteries. They're in the back of the thermostat, so you'll have to remove it from the wall. Here's how.

1. Locate the **latch** at the top of the thermostat. It's at the center of the top rim.
2. Press it down. This will disconnect the thermostat from the top of the wall plate.
3. Remove the thermostat from the **wall bracket** completely by bringing it slightly toward you and lifting it up and off the **lip** on the lower edge of the **wall bracket**.
4. Set the thermostat face down on a flat surface. You will see the batteries in the lower right corner.
5. Remove and discard the old batteries.




OPERATING THE THERMOSTAT

6. Install new batteries by matching the “plus” and “minus” ends of the batteries with the “plus” and “minus” indicators you’ll see outside the two white battery shapes in the space where the batteries sit.
7. Snap the batteries into place.
8. Put the thermostat back on the **wall bracket** by lining up the two **slots** on the bottom edge of the back of the thermostat with the two **lips** on the **wall bracket**. You will feel the **slots** fit over the **lips**.
9. With the bottom of the thermostat attached to the bottom of the **wall bracket**, bring the thermostat back to the wall. Line up the **latch** at the top of the thermostat with the corresponding **lip** on the **wall bracket**.
10. Lightly push the thermostat toward the wall. When the **latch** and **lip** are lined up properly, you will hear the thermostat snap into place.

ADVANCED PROGRAMMING OPTIONS

Advanced programming display codes chart

You can customize several features of your thermostat. This chart shows which features you can change and the codes associated with them. The codes will be shown on the display when you follow the instructions.

Feature	Configuration Code	Change Indication
Fahrenheit to Celsius	U1	F or C
backlighting	U2*	On or Of
keypad lockout	U3	padlock 
programmable or non-programmable	U4	P or nP
number of program periods	U5	4 or 2




* Not available when batteries are installed.

ADVANCED PROGRAMMING OPTIONS

Changing from Fahrenheit to Celsius

Your thermostat is preset to display the temperature in degrees Fahrenheit. You can change this to Celsius.

- 1. Open the door.
- 2. Press and hold the **home** and **sleep** buttons under the display simultaneously for about three seconds.
- 3. Press the **mode** button on the left to change it from *F* (Fahrenheit) to *C* (Celsius).
- 4. Press the **done** button on the lower right.
- 5. Close the door.






ADVANCED PROGRAMMING OPTIONS

Turning off the continuous backlighting

If your thermostat is not powered by the equipment and is instead battery powered, the display will light up for a few seconds after you press any button. This is backlighting. It will go dark after a few seconds.


If the thermostat is powered by electricity, there is always a low level amount of backlighting until you press any button, which increases the lighting temporarily. Here's how to turn off the constant low level backlight when your thermostat is powered by electricity.

- 1. Open the door.
- 2. Press and hold the **home** and **sleep** buttons under the display simultaneously for about three seconds.
- 3. Press the **up** button at the top right of the display. You will see *U2* and *On*. (If you don't, continue to press the **up** button, cycling through the options until you get to *U2* and *On*.)
- 4. Press the **mode** button on the left to change it to *Of*.



ADVANCED PROGRAMMING OPTIONS

- 5. Press the **done** button on the right.
- 6. Close the door.




ADVANCED PROGRAMMING OPTIONS

Keypad lockout

The keypad lockout feature lets you “lock” the thermostat so nobody can change the temperature – or make any other changes – by pressing buttons. Keypad lockout is not activated when the thermostat is installed. Here’s how to activate it.

- 1. Open the door.
- 2. Press and hold the **home** and **sleep** buttons under the display simultaneously for about three seconds.
- 3. Press the **up** button at the top right of the display. You will see *U3*. (If you don’t, continue to press the **mode** button, cycling through the options until you get to *U3*.)
- 4. Press the **mode** button on the left. You will see *U3* and *On* beneath a *padlock icon*. This indicates that the keypad is now locked.
- 5. Press the **done** button on the right.
- 6. Close the door.




ADVANCED PROGRAMMING OPTIONS

Unlocking the keypad

Here's how to temporarily unlock the keypad.

1. Open the door.
2. Press and hold the **up** and **down** buttons on the right simultaneously for about five seconds.
3. The *padlock icon* will disappear. This means the keypad is unlocked and can be used. The keypad will revert back to the locked state after you've stopped pushing buttons for two minutes.
4. Close the door.





ADVANCED PROGRAMMING OPTIONS

Changing from programmable to nonprogrammable



It is possible to convert your thermostat's operation from programmable to nonprogrammable. This eliminates its advanced features. When switching to the nonprogrammable format, you lose the programming, hold, days of the week on the display, and Smart Recovery features. Switching to nonprogrammable also means you'll give up some of the thermostat's energy saving features. The time of day will still show on the display and you will be able to increase or decrease the temperature settings manually. Here's how to switch to nonprogrammable.

1. Open the door.
2. Press and hold the **home** and **sleep** buttons under the display simultaneously for about three seconds.
3. Press the **up** button at the top right of the display. You will see *U4* and *P* (for programmable). (If you don't, continue to press the **up** button, cycling through the options until you get to *U4* and *P*.)



ADVANCED PROGRAMMING OPTIONS

- 4. Press the **mode** button on the left to change it to *nP* (for nonprogrammable).
- 5. Press the **done** button on the right.
- 6. Close the door.







ADVANCED PROGRAMMING OPTIONS

Changing the number of programming periods

Your thermostat is preset with four time periods (P1, P2, P3, P4). You can change this to two. Here's how to change the number of periods in the day.

- 1. Open the door.
- 2. Press and hold the **home** and **sleep** buttons under the display simultaneously for about three seconds.
- 3. Press the **up** button at the top right of the display repeatedly. You will see **U5** and **4**. (If you don't, continue to press the **up** button, cycling through the options until you get to **U5** and **4**.)
- 4. Press the **mode** button on the left to change it from **4** to **2**.
- 5. Press the **done** button on the right.
- 6. Close the door.



SPECIAL FEATURES

Auto Changeover

The thermostat displays one of five modes: heat, cool, Em heat (heat pump version only), heat cool, and off. When the mode selection is for both heating and cooling, the thermostat is in auto changeover mode. This allows the system to switch from heating to cooling – or from cooling to heating – to maintain the temperatures you’ve programmed. It does this automatically.

Smart Recovery

The Smart Recovery feature transitions your home from one temperature period (P1, P2, P3, P4) to the next so that the your home’s temperature matches the temperature setting at the start of each time period. This means, for example, that if your sleep period temperature setting is lower than the period that precedes it, the thermostat will start cooling down the home before the beginning of the scheduled sleep period.

It does this at an energy-efficient rate. This not only helps make your home as comfortable as possible, it also makes your thermostat more cost effective. Call your dealer to adjust Smart Recovery settings.

WHAT IF . . .

The battery icon is displayed

The battery icon appears on the display only when the battery starts to lose power. Replace it when one-third of the icon is black.

If you wait until the icon is just a silhouette with no black bars, the thermostat won't have the power to function correctly. Replace the battery to restore thermostat functions.

“Aux heat on” is displayed (heat pump systems only)

Aux heat on is auxiliary heat. It applies only to the heat pump version. If it is on, you will see **aux heat on**. When it is displayed, it means the system has determined that it's too cold outside for your heat pump to heat the house without help, so it's getting help from the electric heaters. This happens automatically.

“Em heat” is displayed (heat pump systems only)

Em heat is the display term for emergency heat and applies only to the heat pump version. When emergency heat has been turned on, **Em heat** is displayed when you press the **mode** button. You have to turn on emergency heat manually – it doesn't happen automatically – so if you see **Em heat** on the display, it means somebody has turned it on.

WHAT IF . . .

There is a power outage

If you lose electricity and have batteries installed, the thermostat will continue to display the status because it has a battery backup power source. This means that even though your heating and cooling system doesn't work, you will still be able to monitor your home's temperature. In addition, you won't have to reprogram the thermostat because your settings are retained even if the battery dies. The display will continue to show the time for 8 hours while there is no electricity.

You get a system error message

Here are the possible system error messages and what they mean:

- The room air sensor reports that the room air temperature is above 150° or below - 50°.
- E4 This means the memory has failed and the thermostat will return to the factory settings. Call your heating and cooling dealer.

COMMON TERMS AND WHERE TO FIND THEM

Auto changeover page 46

This feature automatically switches your system from heating to cooling – and from cooling to heating – whenever necessary when the thermostat is set in auto mode.

Auxiliary heat (heat pump systems only) page 33

Most heat pump systems can’t heat a home sufficiently when it gets very cold outside so they use a supplemental heating source called auxiliary heat. The system knows when to use this help and does so automatically. If it’s using auxiliary heat, the display will show *aux heat on*. You have no control over the auxiliary heat function.

Backlighting page 39

Backlighting illuminates your display. When the thermostat is powered by electricity, the backlight is on constantly at a dim level that brightens when you push a button. With battery powered thermostats, the backlight is off until you press a button.

COMMON TERMS AND WHERE TO FIND THEM

Emergency heat (heat pump systems only) page 33

You can manually set the thermostat to use emergency heat but it is the most expensive option. If it's using emergency heat, the display will show *Em heat* when you press the **mode** button.

Hold page 30

This function holds the current set temperature.

Mode page 46

This term refers to the type of operation your system is performing. The options are heat, cool, emergency heat, heat cool, and off.

Override page 30

This happens when you temporarily disregard the thermostat's programmed temperature settings and schedules by using the temporary hold or hold options.

Smart Recovery page 46

This feature allows your system to shift from one temperature period to the next scheduled period at an energy-efficient rate.

COMMON TERMS AND WHERE TO FIND THEM

Temporary hold page 29

This function lets you temporarily maintain your temperature settings. The system will return to the scheduled settings during the next time period.

Time period page 19

The thermostat features four time periods. These blocks of time are linked to temperatures you set according to how warm or cool you want the house during those time periods. The time periods are also linked to your Touch ‘N’ Go™ settings of home, away and sleep.

Touch ‘N’ Go page 12

The three Touch ‘N’ Go buttons – home, away and sleep – let you change programmed time periods with the touch of a button. They are particularly useful for somebody who doesn’t want to take advantage of the thermostat’s full programming capability or somebody whose schedule varies from day to day.

NOTES PAGE

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

THERMOSTAT LIMITED WARRANTY



Bryant Heating & Cooling Systems

Limited Warranty for Thermostats

FOR WARRANTY SERVICE OR REPAIR:

Contact the installer or a Bryant dealer. You may be able to find the installer’s name on the equipment or in your Owner’s Packet. You can also find a Bryant dealer online at www.bryant.com

For help, contact: Bryant Heating & Cooling Systems, Consumer Relations, P.O. Box 4808, Syracuse, New York 13221, Phone 1-800-428-4326

PRODUCT REGISTRATION: You can register your product online at www.bryant.com.

Model Number _____ Serial Number _____

Date of Installation _____ Installed by _____

Name of Owner _____ Address of Installation _____

Bryant Heating & Cooling Systems (hereinafter “Company”) warrants this product against failure due to defect in materials or workmanship under normal use and maintenance as follows. All warranty periods begin on the date of original installation. If a part fails due to defect during the applicable warranty period Company will provide a new or remanufactured part, at Company’s option, to replace the failed defective part at no charge for the part. Alternatively, and at its option, the Company will provide a credit in the amount of the then factory selling price for a new equivalent part toward the retail purchase price of a new Company product. Except as otherwise stated herein, those are Company’s exclusive obligations under this warranty for a product failure. This limited warranty is subject to all provisions, conditions, limitations and exclusions listed below and on the reverse (if any) of this document.

THERMOSTAT LIMITED WARRANTY

OWNER-OCCUPIED, RESIDENTIAL APPLICATIONS

This warranty is to the original purchasing owner and is transferable only to the extent and as stated in the Warranty Conditions and below. The warranty period in years, depending on the part and the claimant, is as shown in the chart below.

Product	Limited Warranty (Years)	
	Original Owner	Subsequent Owner
T6, T2, T1 Thermostats***	10* (or 5)	5

- * If properly registered within 90 days, otherwise 5 years (except in California and Quebec and other jurisdictions that prohibit warranty benefits conditioned on registration, registration is not required to obtain longer warranty periods). See Warranty Conditions below.
- *** Applies only to Thermostats. Active electronic finished good accessories, such as the optional Exp module, have different warranty terms. See product for details.

OTHER RESIDENTIAL APPLICATIONS (Apartments, Rental Properties, etc.)

The warranty period is five (5) years. The warranty is to the original owner only and is not transferable.

OTHER APPLICATIONS

The warranty is one (1) year on all such applications. The warranty is to the original owner only and is not transferable.

LEGAL REMEDIES: The owner must notify the Company in writing, by certified or registered letter to Bryant Heating & Cooling Systems, Warranty Claims, P.O. Box 4808, Syracuse, New York 13221, of any defect or complaint with the product, stating the defect or complaint and a specific request for repair, replacement, or other correction of the product under warranty, mailed at least thirty (30) days before pursuing any legal rights or remedies.

THERMOSTAT LIMITED WARRANTY

WARRANTY CONDITIONS:

1. To obtain the longer warranty periods as shown in the table under original owner, for the original purchaser, the product must be properly registered at www.bryant.com within ninety (90) days of original installation. In jurisdictions where warranty terms conditioned on registration are prohibited by law, registration is not required and the longer warranty period shown will be apply.
2. Where a product is installed in a newly constructed home, the date of installation is the date the homeowner purchased the home from the builder.
3. If the date of original installation cannot be verified, then the warranty period begins ninety (90) days from the date of product manufacture (as indicated by the model and serial number). Proof of purchase may be required at time of service.
4. The remainder of the first five years of warranty is freely transferable without registration.
5. Product must be installed properly and by a licensed HVAC technician.
6. The warranty applies only to products remaining in their original installation location.
7. Installation, use, care, and maintenance must be normal and in accordance with instructions contained in the Installation Instructions, Owner's Manual and Company's service information.
8. Defective parts must be returned to the distributor through a registered servicing dealer for credit.

LIMITATIONS OF WARRANTIES: ALL IMPLIED WARRANTIES AND/OR CONDITIONS (INCLUDING IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR USE OR PURPOSE) ARE LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. SOME STATES OR

THERMOSTAT LIMITED WARRANTY

PROVINCES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY OR CONDITION LASTS, SO THE ABOVE MAY NOT APPLY TO YOU. THE EXPRESS WARRANTIES MADE IN THIS WARRANTY ARE EXCLUSIVE AND MAY NOT BE ALTERED, ENLARGED, OR CHANGED BY ANY DISTRIBUTOR, DEALER, OR OTHER PERSON, WHATSOEVER.

THIS WARRANTY DOES NOT COVER:

1. Labor or other costs incurred for diagnosing, repairing, removing, installing, shipping, servicing or handling of either defective parts, or replacement parts, or new units.
2. Any product purchased over the Internet.
3. Normal maintenance as outlined in the installation and servicing instructions or Owner's Manual, including filter cleaning and/or replacement and lubrication.
4. Failure, damage or repairs from faulty installation, misapplication, abuse, improper servicing, unauthorized alteration or improper operation.
5. Failure to start due to voltage conditions, blown fuses, open circuit breakers, or damages due to the inadequacy or interruption of electrical service.
6. Failure or damage due to floods, winds, fires, lightning, accidents, corrosive environments (rust, etc) or other conditions beyond the control of Company.
7. Parts not supplied or designated by Company, or damages resulting from their use.
8. Products installed outside the U.S.A. or its territories and Canada.
9. Electricity or fuel costs, or increases in electricity or fuel costs from any reason whatsoever, including additional or unusual use of supplemental electric heat.
10. Any cost to replace, refill or dispose of refrigerant, including the cost of refrigerant.
11. **ANY SPECIAL, INDIRECT OR CONSEQUENTIAL PROPERTY OR COMMERCIAL DAMAGE OF ANY NATURE WHATSOEVER.** Some states or provinces do not allow the exclusion of incidental or consequential damages, so the above limitation may not apply to you.

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state or province to province.



Copyright 2012 Bryant Heating & Cooling Systems, 7310 W. Morris St. Indianapolis, IN 46231

Catalog No: OM-T2PHP-05BR

Replaces: OM-T2PHP-4BR

Edition Date: 05/12

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.