



The new degree of comfort.™



Residential Electric
Point-of-Use Water Heaters

Point-of-use electric water heaters feature a space-saving design for installation in limited spaces

Efficiency

- .93 EF for 30-gallon model

Features

- High efficiency heating element
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature
- Wall bracket for easy wall mount installations and corrosion resistant 1/4 turn drain valve included with 2.5 gallon model



Plus...

- Temperature and pressure relief valve
- Exclusive Rheemglas® tank lining resists corrosion and prolongs tank life
- 2.5-Gallon model furnished with a 36-inch power cord

Warranty

- 6-Year limited tank and 1-year parts warranty.*

*See Residential Warranty Certificate for complete information

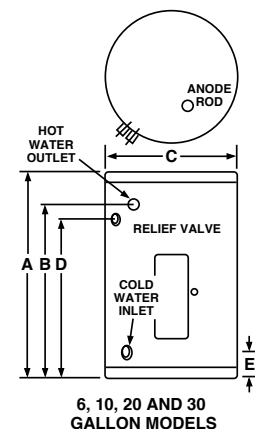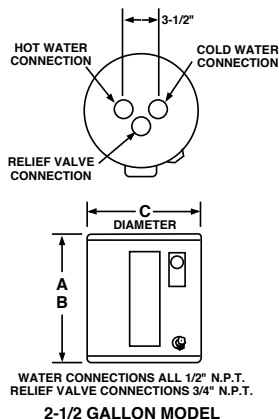

2.5-Gallon



6, 10, 20 and
30-Gallon

Point-of-Use
2.5, 6, 10, 20 and
30-Gallon Capacities
120 Volt AC
2-Wire Single Phase
Electric



DESCRIPTION				ROUGHING IN DIMENSIONS (SHOWN IN INCHES)					APPROX. SHIP WT.	
MODEL NO.	TANK CAPACITY			HEIGHT A	HT. TO HOT WATER OUTLET B	DIAMETER C	HT. TO SIDE T&P D	HT. TO COLD WATER INLET E		
	U.S. GAL.	IMP. GAL.	LITRES						LBS.	KG
RE2	2.5	2	9	14	14	9-3/4	—	—	22	10
RE6	6	5	23	15-1/4	12-1/2	15-3/4	11-1/2	4-1/4	36	16
RE10	10	8.5	39	23	20-1/2	15-3/4	19-1/2	4-1/4	46	21
RE20	20	17	77	25-1/4	22-3/4	19-3/4	21-3/4	5	69	31
82VP30-1	30	23	105	30	23	21-3/4	23	2-3/4	91	41

- **2.5 gallon model:** 1/2" N.P.T. inlet and outlet. Relief valve connection 3/4".

Available with 120 volt AC single phase only, 120v (1440w)

Power cord supplied with 120 volt models only.

- **6 through 30 gallon models:** 3/4" N.P.T. outlet, inlet, anode rod. T & P valve connections. Not available with 3 phase wiring.

Water heaters furnished standard with 120 volt AC 1500 watt single element or 240 volt AC 3000 watt single element.

Special wiring options – a limited number of wiring options are available. Consult factory for price and availability.

CONSTRUCTION DETAILS: The cold water enters the tank a few inches from the bottom. Both hot and cold water lines may be connected directly to the water heater without special nipples or tees. The relief valve simply screws into the opening provided.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT